



## Waste Tank Odour Trap & Breather Kit



### Technical Advantages

- Resilient exterior for longevity
- Can be retrofitted
- Push-fit connector - no specialist installation
- Easy filter replacement by lifting the cap

### Accessories

- Replacement filter / cartridge

## A practical two-way vent and odour trap for waste tanks

The waste tank **Odour Trap & Breather Kit** is a compact and robust two-way vent / air admittance valve. When fitted to a tank, its sturdy, replaceable filter is designed to eliminate bad odours in outdoor drainage applications.

**Applications:** Waste Tanks, Septic Tanks, Grease Separators and Sewage Treatment Plants

The main odour trap component contains a replaceable active carbon filter that operates as a two-way vent, filtering air in both directions. The odour trap's robust, low-profile design means it can be used vertically or horizontally and can be installed in hard-to-reach places. An initial filter cartridge is included as standard and should be replaced when saturated.

### Technical Data\*


Temperature Range:	-20°C to +60°C
Cap & Base Diameter:	130mm (cap) / 110mm (base)
Height:	135mm
Projection above tank:	90-135mm (when fitted)

\*We reserve the right to amend the technical specification to improve the product without prior notification.

### Carbon Filter (Cover removed)



The full kit also includes **a tank adaptor** to allow a tight seal when fitting the odour trap. To connect 4" waste pipework into the tank, we also recommend our **WC-Connector Kit**.

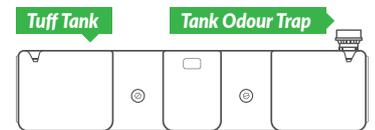

### Fitting: e.g. for Tuff Tank & Mini Tuff Tank

1. Remove 5" lid and collar from tank. Screw brown tank adaptor to exposed 5" hole.
2. Push fit odour trap into tank adaptor. Replace filter every 24 months, as a minimum