

# CONCELO | N4341-1W


## Specifications

### wall faced pan

# tribata.

melbourne. sydney. shanghai.

www.tribata.com.au

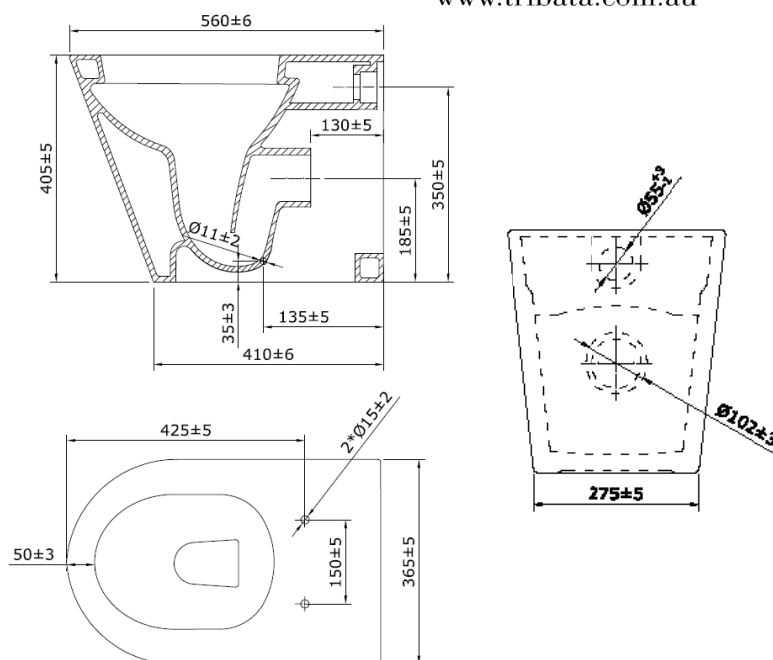

## Features

Recommended Use	Domestic, Commercial
Colour	White
Rim Configuration	Box Rim
Bowl Configuration	P Trap (optional S trap available) - Floor bracket (supplied)
Set Out	P trap 185mm (S Trap 85mm)
Seat	Top fix soft close seat (supplied)
Pan Material	Vitreous china
Pan Weight	31KG
Australian Standards	AS 1172.1
WELS rating	4 Star
Flushing	4.5/3 litre dual flush
Standards Lic. No.	WMKA25446
Cistern Compatibility	N4361W



## Disclaimer:

Products in this specification manual must by regulation be installed by licensed and registered trade people. Under our commitment to product development and improvement, we may change product specifications and dimensions or delete models from the range without prior notification. Dimensions and set-outs listed are correct at time of publication and could contain dimensions which are approximate due to tolerances in manufacturing processes. It is important that you thoroughly review the product and check specifications and dimensions prior to surface preparation, cut-out and installation.

*During the installation of the product by a qualified trained personnel, make sure that the entire fastening surface is even and smooth (no protruding seams or tile offset), that the finish of the wall is suitable to apply the product and has no weak points. It is recommended that all accessories are secured to timber studs.*



---

## Product Care & Maintenance

---

In order to preserve appearance with minimum effort, we offer the following advice. These easy care recommendations are intended to assist you, our customer. They are based on our experience and judgement but must not be regarded as amounting to a legal warranty or liability on our part.

### Vitreous China

Use a mild household detergent, warm soapy water or cream cleaners and clean with a soft cloth.

### Toilet Seats/Plastic Cisterns

The best method of maintaining the finish while ensuring the cleanliness of toilet seats is simply to wipe over with soapy water and a clean, soft cloth. It is important that no abrasive cleaners or wax-based creams are used as this can result in a build-up of deposits/scratches that will detract from the appearance.

### Scratches

Avoid contact with hard, sharp objects. Should scratches occur on plastic products, fine marks can be removed using a cutting compound normally used for car re-treatment or Brasso, followed by buffing with a car polish and a clean, soft cloth.

### Chemical Attack

Plastic products are resistant to most household products, but are not absolutely stain proof. Spills of some products such as hair lacquer, after shave lotion, nail polish and remover, mineral turpentine, white spirit, kerosene, aerosol propellants and insecticides should be removed immediately by washing the product. To restore toilet seat surface if marked, treat as for scratches.

### Discolouration

Products such as hair dye, bleaches, boot polish and the like will discolour the surface if not removed immediately. Provided the discolouration is not severe, restore the surface as described for scratches.

### Burns

Avoid placing hot objects, such as hair straighteners, curling tongs or lit cigarettes on any plastic surface as these will cause discolouration and marking. Should slight accidental damage occur, it may be possible to remove marks as for scratches.

### Flushing

Flushing cleaners or chemical additives should NOT be used inside the cistern. All warranties will be void if such products are used with our products.

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

Products in this specification manual must by regulation be installed by licensed and registered trade people. Under our commitment to product development and improvement, we may change product specifications and dimensions or delete models from the range without prior notification. Dimensions and set-outs listed are correct at time of publication and could contain dimensions which are approximate due to tolerances in manufacturing processes. It is important that you thoroughly review the product and check specifications and dimensions prior to surface preparation, cut-out and installation.

*During the installation of the product by a qualified trained personnel, make sure that the entire fastening surface is even and smooth (no protruding seams or tile offset), that the finish of the wall is suitable to apply the product and has no weak points. It is recommended that all accessories are secured to timber studs.*

---

## Installation Instructions

---

**IMPORTANT INFORMATION, please read before starting installation.**

**CHECK 1**

For packaging purposes, this tapware may come partially assembled.

**CHECK 2**

Before installation, please ensure that you have checked the assembly of all components and joints.

**CHECK 3**

Always use plumbers tape or a recommended sealing compound on all threaded joints.

**CHECK 4**

Please pressure test the tapware prior to installation using recommended testing equipment.

**CHECK 5**

The installer is responsible for selecting the correct fittings and that the distances are correct before installation.

**Plumber Instructions**

**Note:** Installation should only be carried out by a licensed plumber. Tribata do not accept any responsibility of incorrect installation if not installed by a registered plumber.

**Note:** Foreign materials can block the flow regulator, damage the valve and reduce water flow. Please flush the supply lines prior to installation.

**INSTALLATION**

**BASINS AND SINKS**

1. Place the spout assembly into the centre hole of the basin, and securely mount from beneath.
2. Take the taps and remove the handle and flange. Trim the breaching piece if required, and assemble with the tap bodies.
3. Push the tap bodies through the underside of the sink, and then reattach the handle and flange.
4. Connect both water supplies, ensure connections are tight, turn on water and check for leaks.

**WALL INSTALLATION**

1. Place the spout assembly into the wall outlet
2. Install the stuffing box assembly, and connect to the correct water supply.
3. Tighten all connections, turn on the water and check for leaks.

**HOB INSTALLATION**

1. Place the spout assembly into the hob outlet
2. Install the stuffing box assembly, and connect to the correct water supply.
3. Tighten all connections, turn on the water and check for leaks.

**SINGLE INLET**

1. Connect the tap assembly to the outlet
2. Tighten all connections, turn on the water and check for leaks.

Products in this specification manual must by regulation be installed by licensed and registered trade people. Under our commitment to product development and improvement, we may change product specifications and dimensions or delete models from the range without prior notification. Dimensions and set-outs listed are correct at time of publication and could contain dimensions which are approximate due to tolerances in manufacturing processes. It is important that you thoroughly review the product and check specifications and dimensions prior to surface preparation, cut-out and installation.

*During the installation of the product by a qualified trained personnel, make sure that the entire fastening surface is even and smooth (no protruding seams or tile offset), that the finish of the wall is suitable to apply the product and has no weak points. It is recommended that all accessories are secured to timber studs.*