




QUAD CONFIGURATION FOR WELL WATER, OR IRRIGATION PARALLEL SYSTEMS IN SERIES RATED TO 60GPM: Two Views

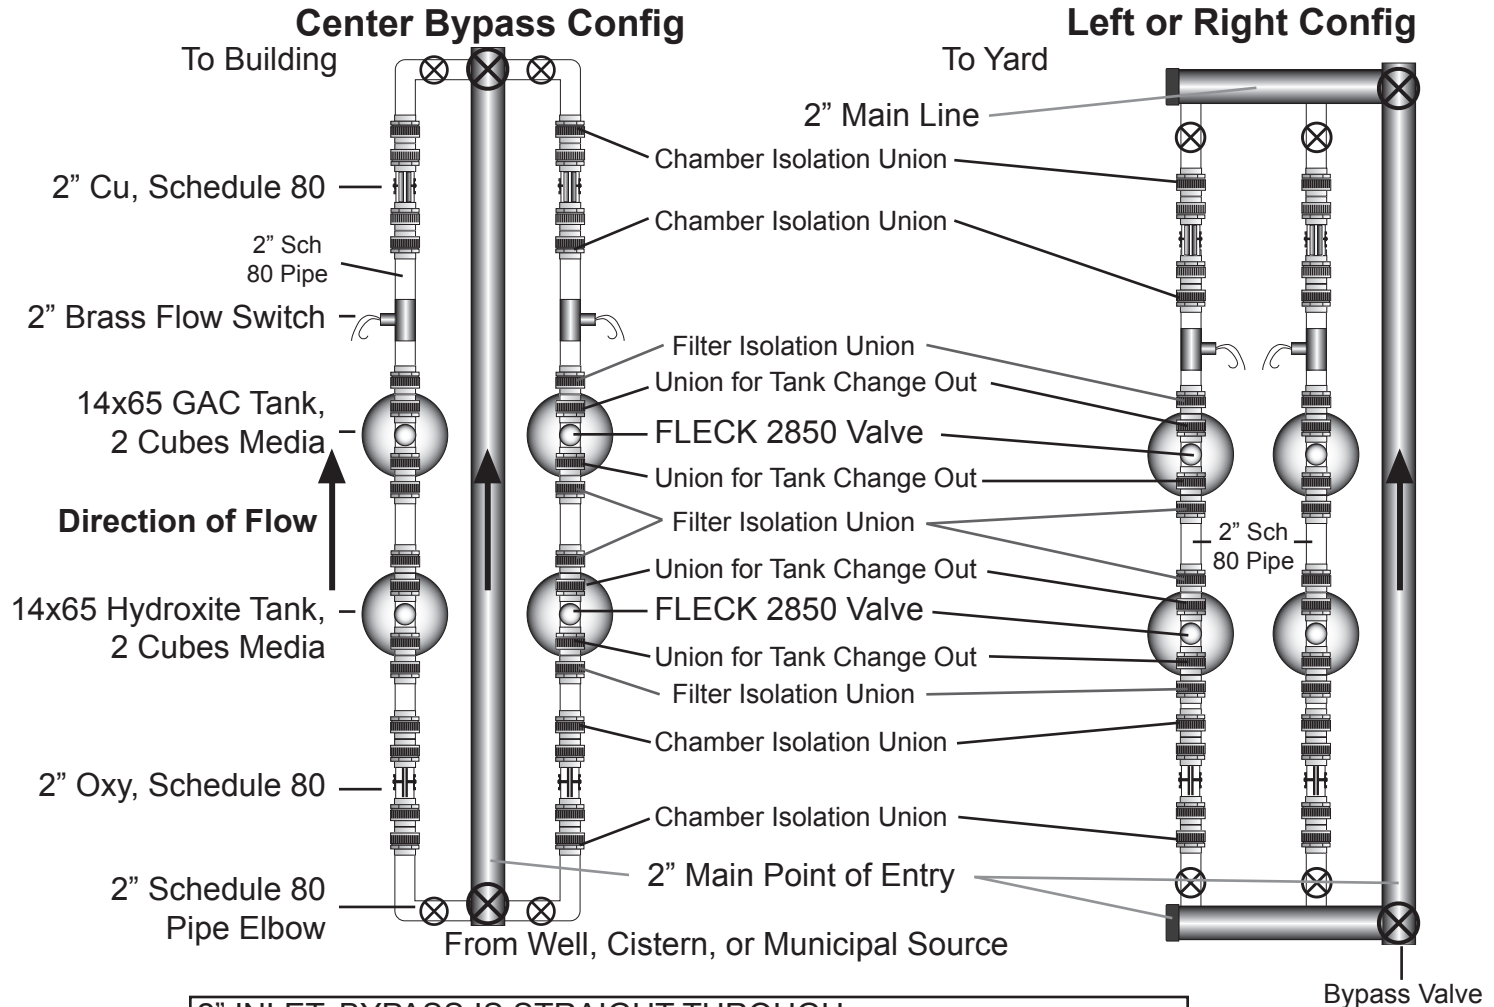

2" INLET, BYPASS IS STRAIGHT THROUGH
Two 2" LINES IN PARALLEL
Two 14x65 GAC AND HYDROXITE TANKS, 1 SET IN EACH SERIES
Two FLECK 2850 VALVES
GATE VALVES ISOLATE Cu/Oxy CHAMBERS
THREE YEAR MEDIA CHANGE OUT, VALVE REBUILD KIT
THREE YEAR COPPER CHANGE OUT
MONTHLY Cu/Oxy CHAMBER CLEAN
VALVE TIMERS CONFIRMED
ALL TANKS BACKWASH AT DIFFERENT TIMES
GAC FLOW CONTROL 7 DFCL
HYDROXITE FLOW CONTROL 12 DFCL
110v / 60Hz ECOsmartE CONTROLLERS
FLECK 2850 VALVES, REBUILD KIT 3RD YEAR

FLOW restricted
at 21GPM to
keep sprinkler
heads in ground.

LOGISTICS:

SHIPS 2 PALLETS - 600lbs ON EACH PALLET