

## Silicone Hose Catalog




**EATON**

*Powering Business Worldwide*



# The Power of One Eaton

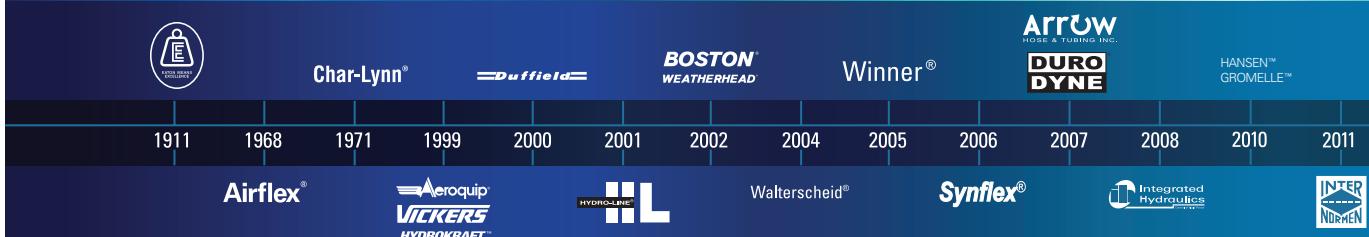

There's a certain energy at Eaton. It's the power of integrating the competencies of some of the world's most respected names to build a brand you can trust to meet every power management need. The energy created supports our commitment to powering business worldwide.

As the world's demand for high-efficiency hydraulic systems for mobile and stationary applications increase, Eaton is helping to solve these challenges more reliably, efficiently, and sustainably. Our goal is simple; to provide unique solutions across a wide range of markets that keep businesses on the leading edge of change. Visit [Eaton.com/hydraulics/fusion](http://Eaton.com/hydraulics/fusion).

**That's the power of One Eaton.**

**EATON**  
Powering Business Worldwide

# Serving eight key segments - sharing one focus



## Alternative Energy

Making energy sources technically practical and economically sound requires the kind of control made possible by high-quality components. When Eaton is on the inside, you will experience the reliable, consistent performance to create and capture energy—making renewable energy an every-day energy.



## Discrete Manufacturing

Produce at peak efficiency with the superior precision and repeatability of Eaton products. Eaton hydraulic components provide the precise control and consistent operation required for virtually every step in your manufacturing operation. With Eaton, we'll help you redefine the meaning of raw productivity.



## Oil & Gas

As the oil & gas industry continues to face further globalization and consolidation, large-scale organizations that can meet your needs in every corner of the world are more difficult to find. At Eaton, our portfolio of products is only surpassed by our tremendous reach.




## Processing

Whatever your industry, no matter which processes you manage, Eaton parts and systems help keep you up and running. Our components make equipment more efficient and easier to use, so you get optimal machine performance and maximum productivity.



## Agriculture & Forestry

There's a reason farming and forestry are called "working the land." These segments involve some of the hardest work and longest hours of any sector in the economy. Your productivity and profitability depend on the way you manage time and tasks.

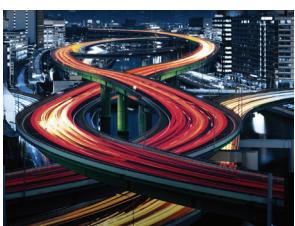

## Commercial Vehicles

Eaton technologies can make your driving operation more successful. Greater comfort and productivity help increase driver retention, while reduced emissions, leaks, and noise improve environmental performance. Increased efficiencies overall mean lower costs and higher net revenue.



## Material Handling

Eaton hydraulic systems provide the precise control and consistent operation required for material handling and utility work. With a broad selection of products and solutions built in, Eaton helps make you a master of your domain.



## Construction & Mining

When you work on a large scale, even the details are big. You need to trust every part of the equipment that lets you handle construction and mining jobs. For reliable components that deliver consistent performance in extreme conditions, turn to Eaton.

# Eaton is a leading diversified power management company

Eaton provides reliable, efficient and safe power management for a growing number of industries.

## Understanding and helping our customers succeed

- Listening and understanding to requirements and business drivers
- Delivering solutions with value propositions to solve the critical business needs

## Knowing what's important to our customers and integrating that knowledge into the fabric of our business

- ...to deliver innovative, quality products
- ...to respond fast
- ...to provide dedicated customer service and support around the globe

## Our strength is global reach with local responsiveness and support

- Customers served in more than 150 countries
- Diverse channels ensure reliable availability and support
- Design and engineering teams provide support for standard products and custom solutions
- Eaton experts offer efficient product and application training

## Table of Contents

General Description .....	4
Heater Hose .....	5
Coolant Hose .....	6
Turbo Hose .....	7
Charge Air Cooler (CAC) Hose .....	8
Hump Hose - Hot Side.....	9
Hose Pump - Cold Side.....	10
Elbows 45° - Hot Side .....	11
Elbows 45° - Cold Side .....	12
Elbows 90° - Hot Side .....	13
Elbows 90° - Cold Side .....	14


# General Description

## Eaton's Silicone Hose Products Excel In Extreme Temperatures And High Vibration Situations.

Eaton's line of silicone hose products can be used in coolant and high temperature applications. The hose products are available for turbo and charge air coolers in straights and in formed hoses for diesel and gas powered engines.

### Features/Benefits

- Resistant to cracking, peeling, ozone, and aging
- Silicone is resistant to extreme temperature conditions up to 500°F
- Compensates for misalignment and offsets vibration
- Aramid reinforced configuration for fatigue-resistance at high temperatures in turbocharger application
- Available in straight lengths, 45°, and 90° elbows
- Heater and Coolant hose are SAE J20 R3 and SAE J20 R1 certified
- Color coded for application use

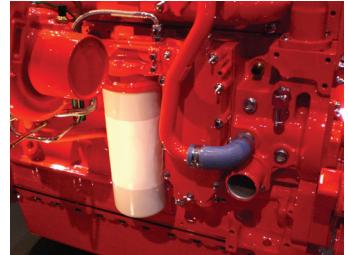

### Applications

- Heavy duty truck and bus engines
- Buses
- Vehicles with diesel engine
- For use in high vibration, hot and cold air aspiration units
- Generators



Part Number	Type	Construction	Temperature	I.D.(in.)
	EH225	Heater Hose	-65° F to +350°F ( -54°C to +177°C)	-04/-16
	EH226	Coolant Hose	-65° F to +350°F ( -54°C to +177°C)	-05/-96
	EH227	Turbo Hose	-65° F to +500°F ( -54°C to +260°C)	-04/-80
	FF90801	CAC Hot Hose	-65° F to +500°F ( -54°C to +260°C)	2 1/2" - 5"
	FF90800	CAC Cold Hose	-65° F to +350°F ( -54°C to +177°C)	2 1/2" - 5"
	FF90829	Hump Hose-Hot	-65°F to +500°F (-54°C to +260°C)	3/4" - 6"
	FF90830	Hump Hose-Cold	-65° F to +350°F ( -54°C to +177°C)	3/4" - 6"
	FF90835	Elbow 90° -Hot	-65°F to +500°F (-54°C to +260°C)	5/8" - 4"
	FF90836	Elbow 45° -Hot	-65°F to +500°F (-54°C to +260°C)	5/8" - 4"
	FF90802	Elbow 90° -Cold	-65° F to +350°F ( -54°C to +177°C)	5/8" - 4"
	FF90803	Elbow 45°-Cold	-65° F to +350°F ( -54°C to +177°C)	5/8" - 3"

## Heater Hose

Meets SAE J20 R3 Class A


Hose Part Number	Hose I.D. mm	Hose I.D. in	Hose O.D. mm	Hose O.D. in	Minimum Burst Pressure bar	Minimum Burst Pressure psi
EH22504	6.40	0.25	11.70	0.46	28	400
EH22505	7.90	0.31	13.20	0.52	21	300
EH22506	9.70	0.38	16.30	0.64	17	250
EH22508	12.70	0.50	19.30	0.76	17	250
EH22510	16.00	0.63	23.60	0.93	17	250
EH22512	19.10	0.75	27.20	1.07	14	200
EH22514	22.40	0.88	31.50	1.24	14	200
EH22516	25.40	1.00	35.10	1.38	12	175

### Construction

- Single ply silicone polyester braid reinforced tube with blue cover

### Operating Temperatures

- 65°F to + 350°F
- 54°C to +177°C
- Available in 25 ft boxes
- For heavy duty pressure connections in hostile engine environments
- Ideal for extreme temperature and various pressure ranges where high performance levels are required
- Contact Eaton for alternative length requirements

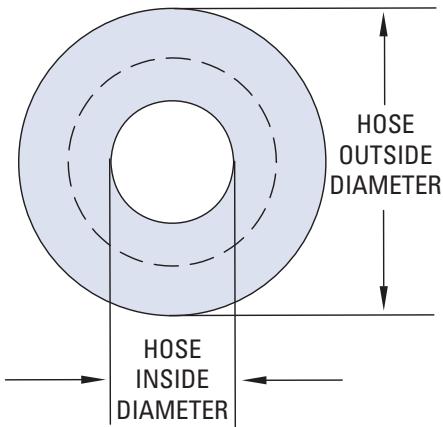

## Coolant Hose

Meets SAE J20 R1 Class A

Hose Part Number	Hose I.D. mm	Hose I.D. in	Hose O.D. mm	Hose O.D. in	Minimum Burst Pressure bar	Minimum Burst Pressure psi
EH22605	7.90	0.31	17.50	0.69	74.50	1080
EH22606	8.70	0.38	19.10	0.75	73.10	1060
EH22608	12.70	0.50	22.10	0.87	60.10	872
EH22610	15.70	0.62	25.10	0.99	55.00	797
EH22612	19.10	0.75	28.40	1.12	52.70	764
EH22614	22.40	0.88	31.80	1.25	50.50	732
EH22616	25.40	1.00	34.80	1.37	48.20	699
EH22617	26.90	1.06	36.60	1.44	46.70	678
EH22618	28.70	1.13	38.10	1.50	45.40	658
EH22620	31.80	1.25	41.10	1.62	42.50	617
EH22622	35.10	1.38	44.40	1.75	37.90	550

## Coolant Hose

Meets SAE J20 R1 Class A

(continued)


Hose Part Number	Hose I.D. mm	Hose I.D. in	Hose O.D. mm	Hose O.D. in	Minimum Burst Pressure bar	Minimum Burst Pressure psi
EH22624	38.10	1.50	47.50	1.87	35.90	521
EH22626	41.10	1.62	50.50	1.99	34.50	501
EH22628	44.40	1.75	53.80	2.12	32.60	473
EH22630	47.80	1.88	57.20	2.25	31.00	450
EH22632	50.80	2.00	60.20	2.37	30.50	442
EH22634	54.10	2.13	63.50	2.50	29.30	425
EH22636	57.20	2.25	66.50	2.62	28.50	413
EH22638	60.50	2.38	69.90	2.75	27.60	400
EH22640	63.50	2.50	72.90	2.87	26.10	379
EH22642	66.50	2.62	75.90	2.99	24.20	351
EH22644	69.80	2.75	79.20	3.12	23.30	338
EH22646	73.20	2.88	82.60	3.25	22.10	321
EH22648	76.20	3.00	85.60	3.37	21.90	317
EH22650	79.50	3.13	88.90	3.50	21.20	308
EH22652	82.60	3.25	91.90	3.62	20.50	298
EH22654	85.90	3.38	95.20	3.75	19.00	275
EH22656	86.90	3.50	98.30	3.87	18.20	264
EH22658	92.20	3.63	101.60	4.00	17.60	256
EH22660	95.20	3.75	104.60	4.12	17.20	249
EH22664	101.60	4.00	111.00	4.37	16.10	233
EH22666	104.90	4.13	114.60	4.51	N/A	N/A
EH22668	108.00	4.25	117.90	4.84	N/A	N/A
EH22672	114.30	4.50	123.70	4.87	N/A	N/A
EH22680	127.00	5.00	136.40	5.37	N/A	N/A
EH22688	139.70	5.50	149.10	5.87	N/A	N/A
EH22696	152.40	6.00	161.80	6.37	N/A	N/A

### Construction

- 4 plies of silicone rubber with polyester woven reinforcement with blue cover
- 3 ft lengths

### Operating Temperatures

- -65°F to + 350°F
- -54°C to +177°C
- For heavy duty pressure connections in hostile engine environments
- Ideal for extreme temperature and various pressure ranges where high performance levels are required
- UV and ozone resistant
- Resistant to electrochemical degradation
- Resistant to minor oil splash and petrochemical exposure
- Contact Eaton for alternative length requirements

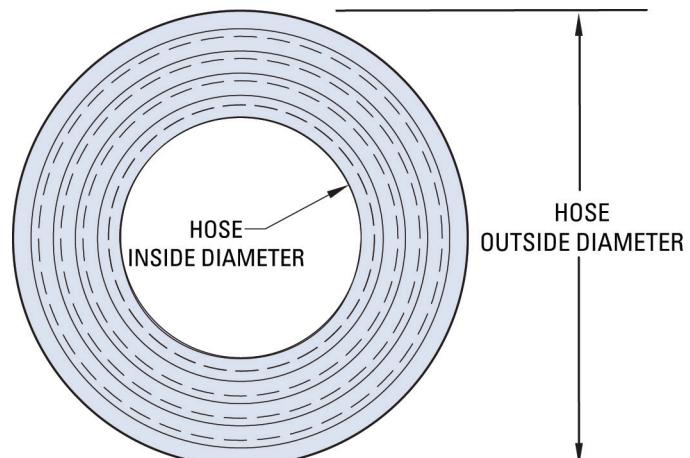

# Turbo Hose


Hose Part Number	Hose I.D. mm	Hose I.D. in	Hose O.D. mm	Hose O.D. in
EH22704	6.40	0.25	14.50	0.57
EH22706	9.70	0.38	17.80	0.70
EH22708	12.70	0.50	20.80	0.82
EH22710	16.00	0.63	24.10	0.95
EH22712	19.10	0.75	27.20	1.07
EH22714	22.40	0.88	30.50	1.20
EH22716	25.40	1.00	33.50	1.32
EH22717	26.90	1.06	35.10	1.38
EH22718	28.70	1.13	36.80	1.45
EH22720	31.80	1.25	39.90	1.57
EH22721	33.30	1.31	41.40	1.63
EH22722	35.10	1.38	43.20	1.70
EH22724	38.10	1.50	46.20	1.62
EH22726	41.10	1.62	49.30	1.94
EH22728	44.40	1.75	52.60	2.07
EH22730	47.80	1.88	55.90	2.20
EH22732	50.80	2.00	58.90	2.32
EH22734	54.10	2.13	62.20	2.45
EH22736	57.20	2.25	65.30	2.57
EH22738	60.50	2.38	68.60	2.70
EH22740	63.50	2.50	71.60	2.82
EH22742	66.50	2.62	74.70	2.94
EH22744	69.80	2.75	78.00	3.07
EH22746	73.20	2.88	81.30	3.20
EH22748	76.20	3.00	84.30	3.32
EH22750	79.50	3.13	87.60	3.45
EH22752	82.60	3.25	90.70	3.57
EH22754	85.90	3.38	94.00	3.70
EH22756	88.90	3.50	97.00	3.82
EH22758	92.20	3.63	100.30	3.95
EH22760	95.20	3.75	103.40	4.07
EH22764	101.60	4.00	109.70	4.32
EH22772	114.30	4.50	122.40	4.82
EH22780	127.00	5.00	135.10	5.32

## Construction

- 4 plies of silicone rubber with aramid woven reinforcement with red cover
- 3 ft lengths

## Operating Temperatures


- -65°F to + 500°F
- -54°C to +260°C
- Designed and engineered for a wide variety of high temperature Turbocharger applications
- UV and ozone resistant
- Contact Eaton for alternative length requirements

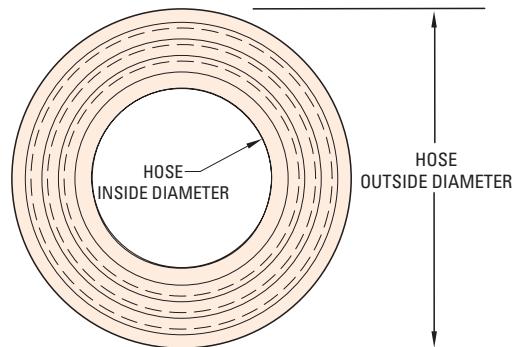

# Charge Air Coolers (CAC) Hose

## Charge Air- Hot side CAC Hose Convoluted

Hose Part Number	I.D. mm	I.D. in	Overall Length mm	Overall Length in
FF90801-01	63.50	2.50	152.40	6.00
FF90801-02	76.20	3.00	152.40	6.00
FF90801-03	88.90	3.50	152.40	6.00
FF90801-04	101.60	4.00	152.40	6.00
FF90801-05	101.60	4.00	177.80	7.00
FF90801-06	101.60	4.00	203.20	8.00
FF90801-07	114.30	4.50	152.40	6.00
FF90801-08	127.00	5.00	152.40	6.00

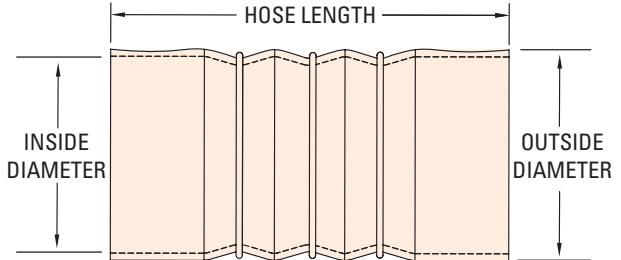

## Construction


- 4 plies of silicone rubber with aramid woven reinforcement with red cover and 304 stainless steel restraining rings

## Operating Temperatures

- -65°F to + 500°F
- -54°C to +260°C
- Designed and engineered to connect engine mounted charge air systems
- UV and ozone resistant
- Ideal for minor misalignments and handling vibration between hose ends

## Charge Air- Cold side CAC Hose Convoluted

Hose Part Number	I.D. mm	I.D. in	Overall Length mm	Overall Length in
FF90800-01	63.50	2.50	152.40	6.00
FF90800-02	76.20	3.00	152.40	6.00
FF90800-03	88.90	3.50	152.40	6.00
FF90800-04	101.60	4.00	152.40	6.00
FF90800-05	101.60	4.00	177.80	7.00
FF90800-06	101.60	4.00	203.20	8.00
FF90800-07	114.30	4.50	152.40	6.00
FF90800-08	127.00	5.00	152.40	6.00

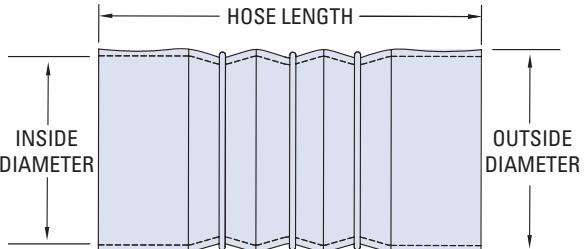

## Construction

- 4 plies of silicone rubber with polyester woven reinforcement with blue cover and 304 stainless steel restraining rings

## Operating Temperatures

- -65°F to + 350°F
- -54°C to +177°C
- Designed and engineered to connect engine mounted charge air systems
- UV and ozone resistant
- Ideal for minor misalignments and handling vibration between hose ends
- 304 stainless steel rings reduce swelling and increase hoop strength

## Hump Hose - Hot Side

Hose Part Number	Hose I.D. mm	Hose I.D. in	Hose O.D. mm	Hose O.D. in	Overall Length mm	Overall Length in
FF90829-12	19.00	0.75	27.10	1.07	152.40	6.00
FF90829-16	25.40	1.00	33.40	1.32	152.40	6.00
FF90829-20	31.80	1.25	39.80	1.57	152.40	6.00
FF90829-24	38.10	1.50	46.10	1.82	152.40	6.00
FF90829-28	44.40	1.75	52.50	2.07	152.40	6.00
FF90829-32	50.80	2.00	58.80	2.32	152.40	6.00
FF90829-36	57.20	2.25	65.20	2.57	152.40	6.00
FF90829-40	63.50	2.50	71.50	2.82	152.40	6.00
FF90829-44	69.80	2.75	77.90	3.07	152.40	6.00
FF90829-48	76.20	3.00	84.20	3.32	152.40	6.00
FF90829-52	82.60	3.25	90.60	3.57	152.40	6.00
FF90829-56	88.90	3.50	96.90	3.82	152.40	6.00
FF90829-60	95.20	3.75	103.30	1.07	152.40	6.00
FF90829-64	101.60	4.00	109.60	4.32	152.40	6.00
FF90829-72	114.30	4.50	122.30	4.82	152.40	6.00
FF90829-80	127.00	5.00	135.00	5.32	152.40	6.00
FF90829-88	139.70	5.50	147.70	5.82	152.40	6.00
FF90829-96	152.40	6.00	160.40	6.32	152.40	6.00


### Construction

- Silicone with aramid reinforcement with red cover

### Operating Temperatures

- -65°F to + 500°F
- -54°C to +260°C

- Designed and engineered for a wide variety of high temperature turbocharger applications
- UV and ozone resistant
- Compensates for system misalignment and offsets vibration

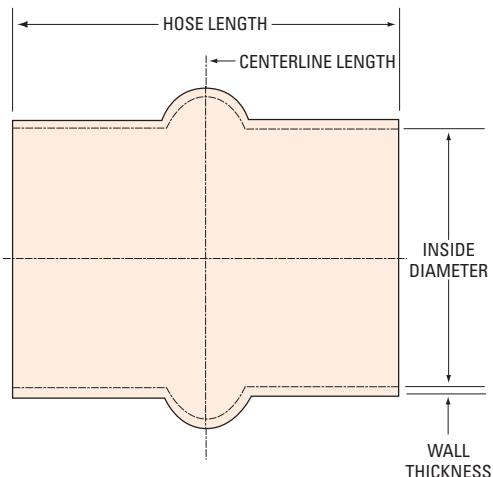

## Hump Hose - Cold Side


Hose Part Number	Hose I.D. mm	Hose I.D. in	Hose O.D. mm	Hose O.D. in	Overall Length mm	Overall Length in
FF90830-12	19.00	0.75	28.50	1.12	152.40	6.00
FF90830-16	25.40	1.00	34.85	1.37	152.40	6.00
FF90830-20	31.80	1.25	41.20	1.62	152.40	6.00
FF90830-24	38.10	1.50	47.55	1.87	152.40	6.00
FF90830-28	44.40	1.75	53.90	2.07	152.40	6.00
FF90830-32	50.80	2.00	60.25	2.37	152.40	6.00
FF90830-36	57.20	2.25	66.60	2.62	152.40	6.00
FF90830-40	63.50	2.50	72.95	2.87	152.40	6.00
FF90830-44	69.80	2.75	79.30	3.12	152.40	6.00
FF90830-48	76.20	3.00	85.65	3.37	152.40	6.00
FF90830-52	82.60	3.25	92.00	3.62	152.40	6.00
FF90830-56	88.90	3.50	98.35	3.87	152.40	6.00
FF90830-60	95.20	3.75	104.70	4.12	152.40	6.00
FF90830-64	101.60	4.00	111.05	4.37	152.40	6.00
FF90830-72	114.30	4.50	123.75	4.87	152.40	6.00
FF90830-80	127.00	5.00	136.45	5.37	152.40	6.00
FF90830-88	139.70	5.50	149.15	5.87	152.40	6.00
FF90830-96	152.40	6.00	161.85	6.37	152.40	6.00

### Construction

- Silicone with polyester reinforcement with blue cover

### Operating Temperatures

- -65°F to + 350°F
- -54°C to +177°C
- Designed and engineered for a wide variety of high temperature turbocharger applications
- UV and ozone resistant
- Compensates for system misalignment and offsets vibration

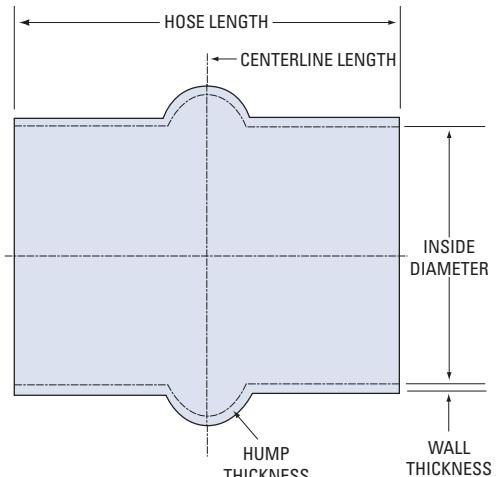

# Elbows 45° - Hot Side

Hose Part Number	Hose I.D. mm	Hose I.D. in	Length 1 mm	Length 1 in	Length 2 mm	Length 2 in	Radius mm	Radius in
FF90836-01	16.00	0.63	152.40	6.00	152.40	6.00	25.40	1.00
FF90836-02	19.10	0.75	152.40	6.00	152.40	6.00	25.40	1.00
FF90836-03	22.40	0.88	152.40	6.00	152.40	6.00	38.10	1.50
FF90836-04	25.40	1.00	152.40	6.00	152.40	6.00	38.10	1.50
FF90836-05	31.80	1.25	152.40	6.00	152.40	6.00	44.40	1.80
FF90836-06	38.10	1.50	152.40	6.00	152.40	6.00	50.80	2.00
FF90836-07	44.40	1.75	152.40	6.00	152.40	6.00	44.40	1.80
FF90836-08	47.80	1.88	152.40	6.00	152.40	6.00	76.20	3.00
FF90836-09	50.80	2.00	152.40	6.00	152.40	6.00	101.60	4.00
FF90836-10	57.20	2.25	152.40	6.00	152.40	6.00	101.60	4.00
FF90836-11	57.20	2.25	152.40	6.00	152.40	6.00	57.20	2.30
FF90836-12	63.50	2.50	152.40	6.00	152.40	6.00	63.50	2.50
FF90836-13	69.90	2.75	152.40	6.00	152.40	6.00	88.90	3.50
FF90836-14	76.20	3.00	152.40	6.00	152.40	6.00	63.50	2.50
FF90836-15	88.90	3.50	152.40	6.00	152.40	6.00	88.90	3.50
FF90836-16	101.60	4.00	152.40	6.00	152.40	6.00	101.60	4.00


## Construction

- 4 plies of silicone rubber with aramid woven reinforcement with red cover

## Operating Temperatures

- -65°F to + 500°F
- -54°C to +260°C

- Designed and engineered for a wide variety of high temperature turbocharger applications
- UV and ozone resistant
- Resistant to minor oil splash and petrochemical exposure

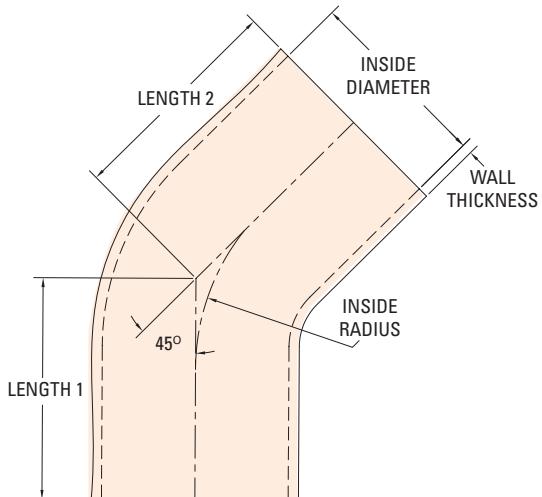

**Elbows 45° - Cold Side**  
 Meets or exceeds SAE J20 R1 Class A  
 TMC RP303B Grade I and Grade II

Hose Part Number	Hose I.D. mm	Hose I.D. in	Length 1 mm	Length 1 in	Length 2 mm	Length 2 in	Radius mm	Radius in
FF90803-01	16.00	0.63	152.40	6.00	152.40	6.00	25.40	1.00
FF90803-02	19.10	0.75	152.40	6.00	152.40	6.00	25.40	1.00
FF90803-03	22.40	0.88	152.40	6.00	152.40	6.00	38.10	1.50
FF90803-04	25.40	1.00	152.40	6.00	152.40	6.00	38.10	1.50
FF90803-05	31.80	1.25	152.40	6.00	152.40	6.00	44.40	1.75
FF90803-06	38.10	1.50	152.40	6.00	152.40	6.00	50.80	2.00
FF90803-07	44.40	1.75	152.40	6.00	152.40	6.00	44.40	1.75
FF90803-08	47.80	1.88	152.40	6.00	152.40	6.00	76.20	3.00
FF90803-09	50.80	2.00	152.40	6.00	152.40	6.00	101.60	4.00
FF90803-10	57.20	2.25	152.40	6.00	228.60	9.00	57.20	2.25
FF90803-11	57.20	2.25	152.40	6.00	152.40	6.00	101.60	4.00
FF90803-12	57.20	2.25	152.40	6.00	152.40	6.00	57.20	2.25
FF90803-13	63.50	2.50	152.40	6.00	152.40	6.00	76.20	3.00
FF90803-14	63.50	2.50	152.40	6.00	152.40	6.00	63.50	2.50
FF90803-15	69.90	2.75	152.40	6.00	152.40	6.00	88.90	3.50
FF90803-16	76.20	3.00	152.40	6.00	152.40	6.00	101.60	4.00


### Construction

- 4 plies of silicone rubber with polyester woven reinforcement with blue cover

### Operating Temperatures

- -65°F to + 350°F
- -54°C to +177°C

- UV and ozone resistant

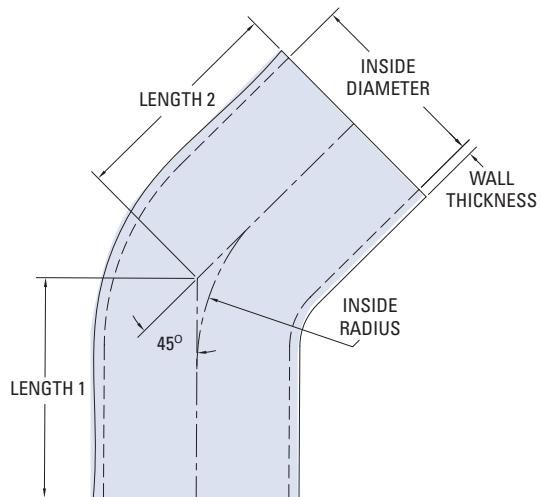

## Elbows 90° - Hot Side

Hose Part Number	Hose I.D. mm in	Length 1 mm in	Length 2 mm in	Radius mm in
FF90835-01	16.00 0.63	152.40 6.00	152.40 6.00	25.40 1.00
FF90835-02	19.10 0.75	152.40 6.00	152.40 6.00	25.40 1.00
FF90835-03	22.40 0.88	152.40 6.00	152.40 6.00	38.10 1.50
FF90835-04	25.40 1.00	152.40 6.00	152.40 6.00	38.10 1.50
FF90835-05	31.80 1.25	152.40 6.00	152.40 6.00	44.40 1.75
FF90835-06	38.10 1.50	152.40 6.00	152.40 6.00	50.80 2.00
FF90835-07	44.40 1.75	152.40 6.00	152.40 6.00	44.40 1.75
FF90835-08	47.80 1.88	152.40 6.00	152.40 6.00	76.20 3.00
FF90835-09	50.80 2.00	152.40 6.00	152.40 6.00	101.60 4.00
FF90835-10	57.20 2.25	152.40 6.00	152.40 6.00	101.60 4.00
FF90835-11	57.20 2.25	152.40 6.00	152.40 6.00	57.20 2.25
FF90835-13	63.50 2.50	152.40 6.00	152.40 6.00	63.50 2.50
FF90835-14	69.90 2.75	152.40 6.00	152.40 6.00	88.90 3.50
FF90835-15	76.20 3.00	152.40 6.00	152.40 6.00	63.50 2.50
FF90835-18	88.90 3.50	152.40 6.00	152.40 6.00	88.90 3.50
FF90835-19	101.60 4.00	152.40 6.00	152.40 6.00	101.60 4.00


### Construction

- 4 plies of silicone rubber with aramid woven reinforcement with red cover

### Operating Temperatures

- -65°F to + 500°F
- -54°C to +260°C

- Designed and engineered for a wide variety of high temperature turbocharger applications
- UV and ozone resistant
- Resistant to minor oil splash and petrochemical exposure

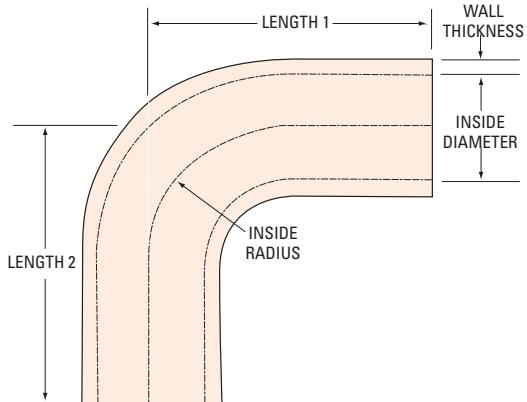

**Elbows 90° - Cold Side**  
 Meets or exceeds SAE J20 R1 Class A  
 TMC RP303B Grade I and Grade II


Hose Part Number	Hose I.D. mm	Hose I.D. in	Length 1 mm	Length 1 in	Length 2 mm	Length 2 in	Radius mm	Radius in
FF90802-01	16.00	0.63	152.40	6.00	152.40	6.00	25.40	1.00
FF90802-02	19.10	0.75	152.40	6.00	152.40	6.00	25.40	1.00
FF90802-03	22.40	0.88	152.40	6.00	152.40	6.00	38.10	1.50
FF90802-04	25.40	1.00	152.40	6.00	152.40	6.00	38.10	1.50
FF90802-05	31.80	1.25	152.40	6.00	152.40	6.00	44.50	1.75
FF90802-06	38.10	1.50	152.40	6.00	152.40	6.00	50.80	2.00
FF90802-07	44.50	1.75	152.40	6.00	152.40	6.00	44.50	1.75
FF90802-08	47.80	1.88	152.40	6.00	152.40	6.00	76.20	3.00
FF90802-09	50.80	2.00	152.40	6.00	152.40	6.00	101.60	4.00
FF90802-10	57.20	2.25	152.40	6.00	228.60	9.00	57.20	2.25
FF90802-11	57.20	2.25	152.40	6.00	152.40	6.00	101.60	4.00
FF90802-12	57.20	2.25	152.40	6.00	152.40	6.00	57.20	2.25
FF90802-13	63.50	2.50	152.40	6.00	152.40	6.00	76.20	3.00
FF90802-14	63.50	2.50	152.40	6.00	152.40	6.00	63.50	2.50
FF90802-15	69.90	2.75	152.40	6.00	152.40	6.00	88.90	3.50
FF90802-16	76.20	3.00	152.40	6.00	152.40	6.00	101.60	4.00
FF90802-17	76.20	3.00	152.40	6.00	152.40	6.00	76.20	3.00
FF90802-18	76.20	3.00	152.40	6.00	152.40	6.00	127.00	5.00
FF90802-19	88.90	3.50	152.40	6.00	152.40	6.00	88.90	3.50
FF90802-20	101.60	4.00	152.40	6.00	152.40	6.00	101.60	4.00

**Construction**

- 4 plies of silicone rubber with polyester woven reinforcement with blue cover

**Operating Temperatures**

- -65°F to + 350°F
- -54°C to +177°C
- UV and ozone resistant

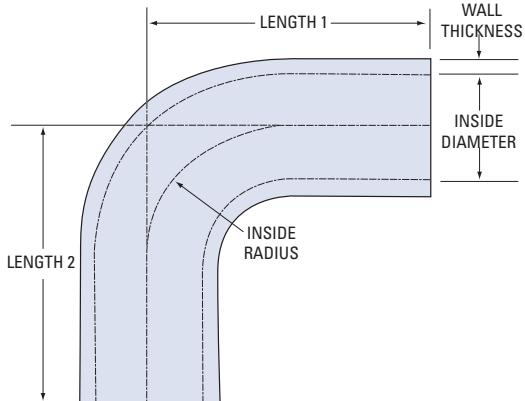

**Eaton**  
Hydraulics Group USA  
14615 Lone Oak Road  
Eden Prairie, MN 55344  
USA  
Tel: 952-937-9800  
Fax: 952-294-7722  
[www.eaton.com/hydraulics](http://www.eaton.com/hydraulics)

**Eaton**  
Hydraulics Group Europe  
Route de la Longeraie 7  
1110 Morges  
Switzerland  
Tel: +41 (0) 21 811 4600  
Fax: +41 (0) 21 811 4601

**Eaton**  
Hydraulic Group Asia Pacific  
11th Floor Hong Kong New World Tower  
300 Huaihai Zhong Road  
Shanghai 200021  
China  
Tel: 86-21-6387-9988  
Fax: 86-21-6335-3912