

SPECIFICATIONS

Model		PRO-14	PRO-14A	PRO-14E	PRO-14AE
Style		Non-Alignment	Alignment	Non-Alignment	Alignment
Lifting Capacity		14,000lbs(6500kg)	14,000lbs(6500kg)	14,000lbs(6500kg)	14,000lbs(6500kg)
Lifting Time		76S	76S	76S	76S
Overall Length (Inc. Ramps)	A	257 1/2" (6541mm)	257" (6528mm)	286" (7265mm)	285 1/2" (7252mm)
Overall Length(No Inc. Ramps)	B	216 1/2" (5500mm)	216 1/2" (5500mm)	245" (6224mm)	245" (6224mm)
Overall Width	C	130 7/8" (3324mm)	130 7/8" (3324mm)	130 7/8" (3324mm)	130 7/8" (3324mm)
Width Between Posts	D	116" (2946mm)	116" (2946mm)	116" (2946mm)	116" (2946mm)
Lifting Height	E	73 1/2" (1865mm)	75 3/8" (1915mm)	73 1/2" (1865mm)	75 3/8" (1915mm)
Overall Height	F	86" (2185mm)	86" (2185mm)	86" (2185mm)	86" (2185mm)
Minimum Height	G	7 7/8" (200mm)	9 7/8" (250mm)	7 7/8" (200mm)	9 7/8" (250mm)
Runway Width	H	20" (508mm)	20" (508mm)	20" (508mm)	20" (508mm)
Drive-Thru Clearance	I	102 1/8" (2592mm)	102 1/8" (2592mm)	102 1/8" (2592mm)	102 1/8" (2592mm)
Width Between Runways	J	47" (1194mm) Max. 54 1/2"(1385mm)			
Min. Four Wheel Align	K	/	92 1/2" (2350mm)	/	92 1/2" (2350mm)
Max. Four Wheel Align	L	/	169 5/8" (4310mm)	/	169 5/8" (4310mm)
Max. Two Wheel Align	M	/	175 1/4" (4450mm)	/	203 1/2" (5170mm)
Gross Weight		2,818lbs(1278kg)	3,395lbs(1540kg)	2,948lbs(1337kg)	3,605lbs(1635kg)
Motor		2.0HP,220V/60Hz,single phase			


FOUR POST
COMMERCIAL LIFT

AMGO heavy-duty four post lifts are best choice for heavy duty vehicles or trucks in commercial shops... stronger and faster! .



Optional Rolling Jack

RJ-8A: pneumatic hydraulic type 8,000lbs(3,500kg)
RJ-10A: pneumatic hydraulic type 10,000lbs(4,500kg).

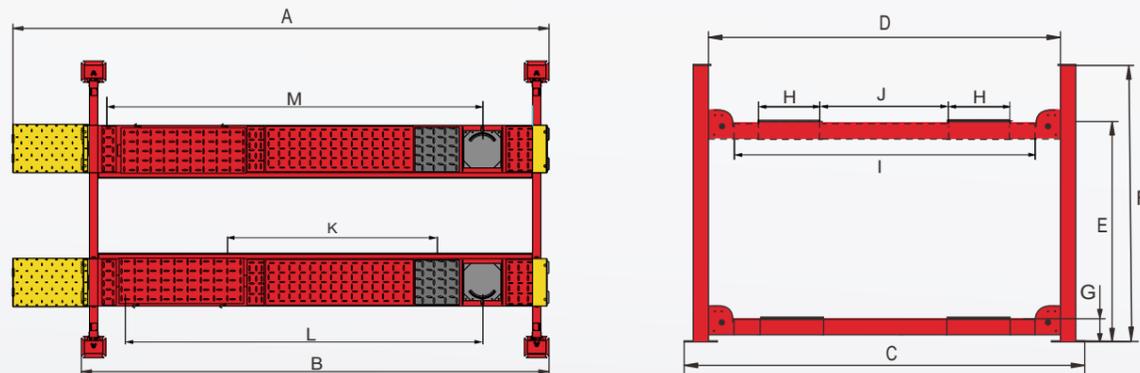

AMGO HYDRAULIC CORPORATION

1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel:(803)505-6410 www.amgohyd.com

PRO-14

PRO-14E


PRO-14A

PRO-14AE

FOUR POST COMMERCIAL LIFT

AMGO powerful 4-post lift provides a 14,000 lbs lifting capacity and features extra wide runways to accommodate a wide variety of vehicle types and wheel bases.

- ✓ 14,000 lbs lifting capacity;
- ✓ Air-released safety lock for convenient operation and reliability;
- ✓ Mechanical self-locking device and cable-breaking protection;
- ✓ Skid proof diamond platform;
- ✓ Hydraulic cylinders are designed to high standards with high quality seals;
- ✓ Strict quality control of cylinders with flow restrictors to keep a constant low speed;
- ✓ The width of platform is 508mm(20") the width between two platforms is adjustable, maximum 54 1/2" (1385mm)
- ✓ Optional Rolling Jacks:
 - RJ-8A: pneumatic hydraulic type 8,000lbs(3,500kg);
 - RJ-10A: pneumatic hydraulic type 10,000lbs(4,500kg);
- ✓ More choices:
 - Optional led lights Kits No.: 40102001;
 - Optional extension Kits No.: 41403;
 - Optional air line Kits No.: 40102.

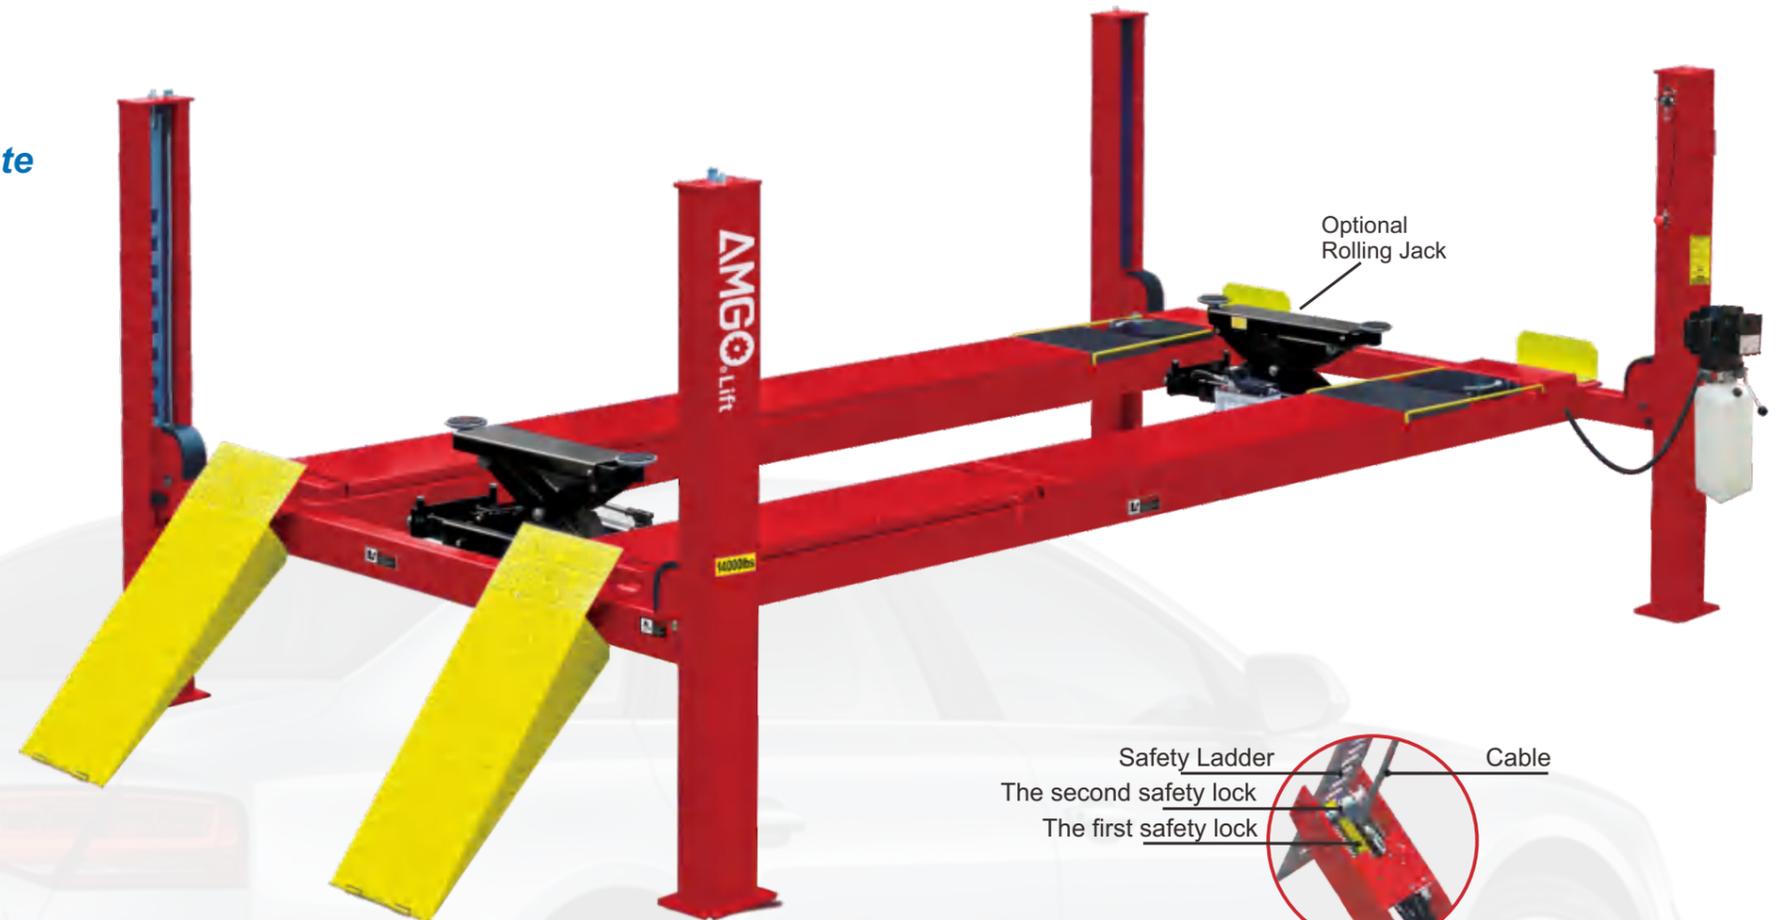

Safety Ladder
Cable
The second safety lock
The first safety lock
Double-safety locks

FEATURES




- Air controlled safety device.




- Adjustable turnplate blocks for the PRO-14A, PRO-14AE.
Optional turnplate. Kits No.: 40101



- New rear-slip ball sets.
Optional LED light kits is fitted for every model of AMGO 4-post lifts.
LED Kits No.:40102001

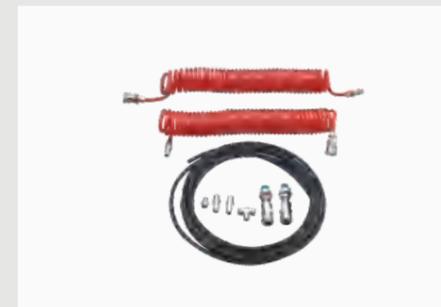

- Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump accessories. Kits No.:40102

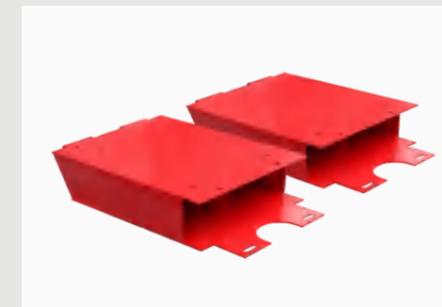

- Optional length extension kits adds an extra 26" (660mm) length to the platform.
Kits No.: 41403.



- Optional adjustable blocks for alignment 4 post lift.
Kits No.: 40905 (used with kits 41403)