

CTSF – SINGLE JACKET NO ARMOR + 22AWG (DRY)

Overview

Connect Fiber's Single Jacket traceable cable is constructed with a unique second coating and stranding technology provide the fibres with enough space and bending endurance which improves cable handling and reduces the installation time while lowering risk of cable and fiber damage. The manufacturing processes utilized high quality raw materials that guarantee the cable to be able to withstand the typical service condition for a period of twenty-five (25) years without detriment to the operation characteristics of the cable.

Features

- ITU-T G.652.D rated fiber with improved attenuation and bend performance as well as compatibility with standard single-mode.
- The unique second coating and stranding technology provide the fibres with enough space and bending endurance.
- Gel-Free water blocking design simplifies access, saves time and avoids environmental pollution, small diameter and light weight extend installation length.
- High quality raw material guarantees long service life of cable.

Ordering Information

Fiber Count	Part Number	Description
48	CTSF-048-SLT-SJNA-T-DRY	48 Fiber Stranded Loose Tube, 12.5mm, Black PE UV Resistant Jacket, 250um Single Mode, G.652D
72	CTSF-072-SLT-SJNA-T-DRY	72 Fiber Stranded Loose Tube, 12.5mm, Black PE UV Resistant Jacket, 250um Single Mode, G.652D

Standards

CABLE DESCRIPTION

- G.652D SM-fibers: 48/72
- Loose tubes SZ-stranded.
- Suitable for direct buried, duct or aerial installation.

DESIGN AND TEST CRITERIA

Optical fibres are housed in loose tubes that are made of high-modulus plastic and filled without any waterproof compounds except water block yarns, and there is no any jelly in the cable core, so the cable is totally dry type and different from those semi-dry cables. FRP is applied as central strength member. PP loose tubes are SZ stranded around the central strength member. Dry water blocking material is used in and over the cable core to prevent it from water ingress. Polyethylene sheath are applied as outer sheath. Two ripcords for easy removal of jacket.

- ITU-T G.652D Characteristics of a single-mode optical fiber
- IEC 60794-1-1 Optical fiber cables- part1-1-Generic specification-General
- IEC 60794-1-2 Optical fiber cables- part1-2-Generic specification-Basic optical cable test procedure
- IEC 60794-3 Optical fiber cables- part3-Sectional specification- Outdoor cables
- IEC 60794-3-10 Optical fibre cables-part 3-10: Outdoor cables-Family specification for duct and
- IEC 60794-3-11 Optical fibre cables-part 3-11: Outdoor cables-Detailed specification for duct and

WORKING CONDITIONS

- Transportation temperature: -40 °C to 70 °C
- Installation temperature: -20 °C to 70 °C
- Operation temperature: -40 °C to 70 °C

MINIMUM ALLOWABLE BENDING RADIUS

- Static: 15D (D: is the out diameter of the cable)
- Dynamic: 20D (D: is the out diameter of the cable)

CONNECT

telecommunications solutions inc.

650 Rupert Street, Waterloo, ON N2V 2R8
Phone: 877.900.7996 or 519.748.4411 Fax: 519.748.0466
customerservice@connect-telcom.com

www.connect-telcom.com

CTSF – SINGLE JACKET NO ARMOR + 22AWG (DRY)

Specifications

Optical properties of the SM fiber are achieved through a germanium doped silica based core with a pure silica cladding which meets ITU-T G652D, UV curable acrylate protective coating is applied over the glass cladding to provide the necessary maximum fiber lifetime. Geometrical, optical, and mechanical characteristics of fiber in cable as the following table:

Category	Description	Specification
Geometrical Characteristics	Cladding diameter	125.0 ± 1 µm
	Cladding non-circularity	≤1.0 %
	Core concentricity error	≤ 0.6µm
	Coating diameter	245± 7 µm (Before Color Coating) 250± 15 µm (Colored)
	Coating/cladding concentricity error	≤12.0 µm
Optical Characteristics	Mode field diameter at 1310 nm	9.1 ± 0.4 µm
	Mode field diameter at 1550 nm	10.4 ± 0.5 µm
	Attenuation at 1310 nm	≤0.36 dB/km max after cabling
	Attenuation at 1550 nm	≤ 0.22 dB/km max after cabling
	Zero dispersion wavelength	1312 ~ 1324nm
	Zero dispersion slope	≤ 0.092 ps/(nm ² ·km)
	Cable cut-off wavelength	≤ 1260 nm
	Polarization mode dispersion design link value (M=20, Q=0.01%)	≤ 0.1 ps/√km-1/2
Mechanical Specification	Bending loss (100 turns, 50mm radius, 1310/1550nm)	≤ 0.05 dB
	Tensile performance(N)	1400 Short term
	Crush(N/100mm)	2000 Short term

DIMENSIONS AND DESCRIPTIONS OF CABLE CONSTRUCTION

Item	Details	Fiber Count	
		48F	72F
Loose tube	Number	4	6
	Outer diameter (mm)	2.4	
Fiber counts per tube (G652D)		12 Fibers	
Filler	Number	2	0
Cable diameter (approx.)		12.0	
Cable weight(kg/km) Approx.		95	
Central Strength member	Material	FRP	
	Diameter (mm)	Nominal: 3.5	
Copper Wire	Diameter (mm)	2.0 ± 0.1	
	Conductor diameter (mm)	Nominal: 0.58	
Water Blocking Material		Water Blocking Tape	
Outer sheath	Material	MDPE	
	Color	Black	
	Thickness (mm)	Approx. 1.6	
Ripcord	Number	2	

Cable Construction




650 Rupert Street, Waterloo, ON N2V 2R8
 Phone: 877.900.7996 or 519.748.4411 Fax: 519.748.0466
 customerservice@connect-telcom.com

www.connect-telcom.com

CTSF – SINGLE JACKET NO ARMOR + 22AWG (DRY)

CROSS SECTION VIEW

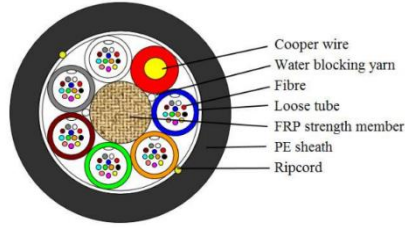

Colour Coding of the Fiber Jackets

INDIVIDUAL FIBER JACKETS

Each individual fiber can be identifiable throughout the length of the cable in accordance with the following colour sequence. Fiber colour in each tube starts from Fiber #1 which is Blue.

Fiber jacket colour	1	2	3	4	5	6
	Blue	Orange	Green	Brown	Slate	White
	7	8	9	10	11	12
	Red	Black	Yellow	Purple	Pink	Aqua

FIBER BUFFER TUBE JACKETS

Each fiber buffer bundle can be identifiable throughout the length of the cable in accordance with the following colour sequence. Fiber colour in each tube starts from No. 1 Blue.

Buffer tube colour	1	2	3	4	5	6
	Blue	Orange	Green	Brown	Slate	White