



910



Bolt Down Detail

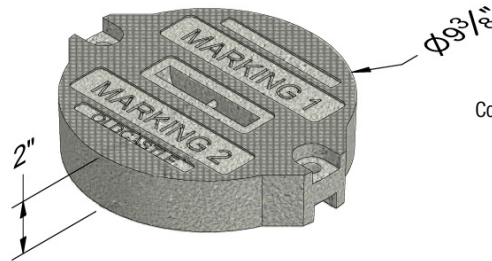

COVER:	
Style:	Flush Solid
Material:	Polymer Concrete
Model:	9" Dia.
Weight:	10 lbs
Std. Fasteners:	3/8-16 Stainless Steel Hex Head Bolt, Washer and Floating Nut
Options:	Logos and Special Markings
Surface:	Slip Resistant & Marked*
Coefficient of Friction:	>0.6 ASTM 1028
Performance:	ANSI/SCTE-77 Tier 22, WUC 3.6, ASTM C857 A-16

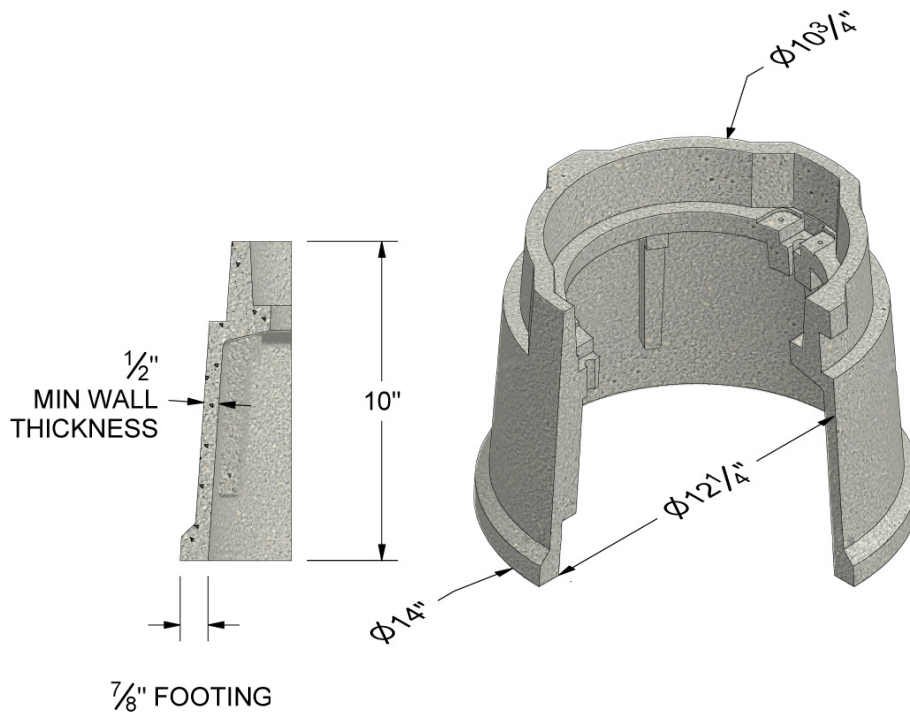

BODY:	
Material:	Polymer Concrete
Model:	9" Dia.
Weight:	10" Depth: 22 lbs
Wall Type:	Flared
Performance:	ANSI/SCTE-77 Tier 22, WUC 3.6, ASTM C857 A-16



**Heavy Duty: Incidental,
Non-deliberate Traffic**

For use in non-vehicular traffic situations only.

Actual load rating is determined by the box and cover combination. Weights and dimensions may vary slightly.

* Cover comes standard with permanent markings for manufacturer, load rating, model size and manufacturing location.

Contact your Oldcastle Enclosure Solutions Distribution Center for specific information and additional options.

910
Options:
Available Polymer Covers:

Flush Solid (Standard)

Fastener Options for Polymer Covers:

 Penta Head Bolt
 Oldcastle Enclosures Vandal Proof Bolt
 Penta Coil Thread Bolt
 Captive Bolt Retainer


Add on Options:

 EMS Marker
 Mouseholes/Knockouts
 Ground Buss
 Racking Provision
 Lid Gaskets*

*Lid Gaskets inhibit water flow into the box, they do not make Enclosure fully waterproof.



Polymer Cover



Hex Head

Penta Head

Vandal Proof



Ground Buss

**Raw Material
Specifications:**

Standard Test Method	Properties of Raw Material	ASTM Designation	Typical Value
Compressive Strength of Polymer Concretes	Compressive Strength	C 579	> 11,000 psi
Flexural Properties of Plastic Materials	Flexural Strength	D 790	> 3,000 psi
Resistance of Plastics to Chemical Reagents	Chemical Resistance	D 543	Retain > 75% of original strength
Impact Resistance by Means of a Falling Weight	Impact Resistance	D 2444	> 70 ft-lb
Static Coefficient of Friction	Friction Coefficient	C 1028	> 0.6

ASTM Specifications shall be the current revision

Test Reports available on request

The Rural Utility Service (RUS) is a department of the US Department of Agriculture organized to facilitate rural developments. You will find Oldcastle Enclosure Solutions brand enclosures listed by the RUS. All Oldcastle Enclosure Solutions brand enclosures conform to the RUS "Tamper Resistant" fastener design for buried pedestals.

**Product Load
Rating:**

Heavy Duty : Non-deliberate Traffic

For use in non-vehicular traffic situations only.

Note:

Actual load rating is determined by the box and cover combination. Weights and dimensions may vary slightly

All information contained on this sheet is current at the time of printing.

Oldcastle Precast, Inc. reserves the right to discontinue or update product information without notice.



Distributed By:

CONNECT
telecommunications solutions inc.

Connect Telecommunications Solutions Inc.

139 Dearborn Place, Waterloo, ON N2J 4N5

Toll Free: 1-877-900-7996

Phone: 519 748 4411 Fax: 519 748 0466

customerservice@connect-telcom.com

www.connect-telcom.com