



Neutral Fuels



B20 BIOFUEL



WELCOME TO B20 BIOFUEL


B20 is a blend of our flagship pure B100 net zero biofuel with fossil fuel at a ratio of 20% biofuel, 80% fossil fuel.

The most important effect of using biofuel is that it alleviates climate change by reducing emissions of carbon dioxide and equivalents (CO₂e). Using our B20 biofuel blend offers a 20% reduction in carbon footprint on a lifecycle basis.

B20 is our fastest growing and most popular blend and offers a good balance between carbon reduction targets, cost, and performance.

Some vehicle manufacturers are now linking new vehicle warranties to the use of B20 in an effort to incentivise vehicle and fleet owners to make the shift away from fossil fuels. B20 is a good way for vehicle owners to test the viability of biofuel before transitioning to B100 net zero fuel.

To meet the emission reduction goals stipulated by the IMO in January 2020, our B20 marine biofuel also replaces conventional marine bunker fuels, enabling the maritime industry to become part of the solution to climate change.

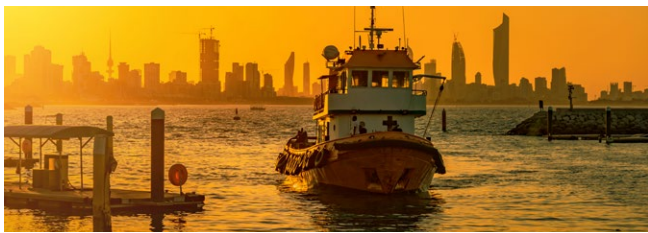

REDUCING

Twenty percent of the UAE'S carbon footprint comes from CO₂e emitted by vehicles that use fossil fuel. Switching to B20 biofuel immediately helps to reduce this transportation carbon footprint.

Neutral Fuels B20 reduces the amount of unburnt fuel per vehicle too, which has the effect of increasing fuel efficiency and further lowering emissions. It also burns cleaner than other fuels which reduces smog, soot and other tailpipe emissions.



SAVING

Biofuel doesn't just support corporate decision-making from the heart, but from the head too because saving costs is important to every business. Built-in benefits include:

- Reduced maintenance costs – B20 can help to break down and remove carbon deposits that build up in diesel engines. Without these deposits, fuel injector valves don't get clogged up, engine performance is improved, there are fewer dirty emissions, and fuel consumption is further improved.
- Reduced replacement costs for parts and engines – B20 biofuel helps to actively prolong engine life by lubricating modern fuel injection parts which improves metal-to-metal contact, reducing wear and prolonging engine life. Independent tests show that our B20 biofuel improves lubricity by a minimum of 40%.

MANAGING

At Neutral Fuels we focus obsessively on technology because we understand the power it has to improve business. Our biofuel is surrounded by game-changing technology that we've developed to give businesses everything they need to know about their transportation fleets.

This includes a full audit through the supply chain to meet requirements for performance metrics and purchasing management while reducing shrinkage. It also includes an artificial intelligence engine embedded in our methodology, a cloud-based data portal, and handheld apps and IoT sensors reporting to our control room. Together, these tools provide operational and cost efficiencies that simply aren't available anywhere else.

COMPATIBILITY

Neutral Fuels B20 is fully compatible with diesel engines manufactured worldwide. There is no need for any engine modification. Switching from petro diesel will only improve engine performance and fuel economy.

Neutral Fuels is already a proven supplier of biofuel to some of the leading companies in the region, meeting not only their requirements to support their environmental initiatives but also supplying biofuel to the highest quality standards. Neutral Fuels products are third party tested to the newly created UAE ESMA Standard for biodiesel UAE.S 5023:2018, European Standard EN14214, American Standard ASTM D6751, and Indian standard IS15607-2016. We have been producing standards-compliant fuel locally in the GCC region since 2011.

Based on European technology and British engineering, quality has always been at the forefront of our operations to the extent that we have set an unprecedented high standard for the biofuel industry. We use state-of-the-art stainless steel refinery equipment and specialised European chemicals to keep our biofuel clean and safe, and our external auditing is meticulous.

We pay attention to provenance, using only high quality feedstock (in our case used cooking oil) to ensure the excellent quality of our fuel.

B20 SPECIFICATION

To qualify for the Neutral Fuels brand name, B20 blend must abide by the high quality standards set in the UAE to assure excellent performance. Our parameters reflect properties of the chemical compounds of biodiesel, and parameters that reflect the quality of our production process. The biodiesel component meets the European standard EN14214 and may be blended to customer requirement with UAE official diesel which meets UAE ESMA S447:2013. Our B20 blend meets the following specification:

#	Property	Units	Test Method	Limit
1	Appearance	-	Visual	Clear
2	Colour, ASTM	-	UAE.S GSO ISO 2049, ASTM D-1500	2.0 Maximum
3	Ash	mass %	UAE.S GSO ISO 129 : 1990, ASTM D-482	0.01 Maximum
4	Calorific value, gross	kcal/kg	ASTM D-4868	Report
5	Carbon residue - 10% MCRT	mass %	UAE.S GSO ISO 10370, GSO, ISO 1171, ASTM D-4530	0.20 Maximum
6	Acid Number - Strong Acid Number - Total	mgKOH/g	UAE.S GSO 1075/2002, ASTM D 974	Nil Maximum 0.1 Maximum
7	Cetane Index	-	UAE.S GSO ISO 4264/2008, ASTM D-976, ASTM D-4737	50 Minimum
8	Copper Strip Corrosion, 3 hrs 100° C		UAE.S GSO ASTM D-130	1 Maximum
9	Density @ 15° C	Kg/Ltr	ASTM D-1298, ASTM D-4052	0.820 - 0.845
10	Distillation, 95% recovery at	°C	UAE.S GSO ISO 3405, ASTM D-86	360 Maximum
11	Flash Point, PMCC	°C	UAE.S GSO ISO 2719, ASTM D-93	65 Minimum
12	Pour Point	°C	UAE.S GSO ISO 3016, ASTM D-97, ASTM D-5949	Report
13	Cloud Point	°C	ASTM D-2500, ASTM D-5773	Report
14	CFPP	°C	ASTM D-6371, IP 309	Summer +12°C Winter +5°C
15	Sediments + Water	Vol. %	ASTM D-2709	0.05 Maximum
16	Sulphur, Total	mg/kg	UAE.S GSO ISO 20884, ASTM D-5453, ASTM D-2622, ASTM D-4294	10 Maximum
17	Viscosity @ 40°C	cSt.	UAE.S GSO ISO 3104, ASTM D-445	2.0 - 4.5
18	Poly Aromatic Hydrocarbon (PAH)	mass %	IP 391	11 Maximum
19	Lubricity, HFRR	microns	ASTM D-6079, IP 450	300 Maximum
20	Oxidation Stability	g/m³	ASTM D-2274	25 Maximum
21	Conductivity @ 20°C	Ps/m	ASTM D-2624	50 Minimum

KEEPING IT LOCAL TO FURTHER REDUCE CARBON EMISSIONS

Our biofuel production is always a city level operation. We call it local/local/local: producing fuel in our local biorefinery from local waste for use by local customers.

Biofuel is commonly produced in huge factories using feedstock sourced from thousands of kilometres away and sold to customers thousands of kilometres away. Our philosophy is the opposite. Our feedstock supply and our customers are local to our biorefineries. We use only feedstock that has already served its core purpose so right from the start of the process we have a 100% net zero carbon footprint and we don't add to global deforestation.

Unless every one of us is helping to save our planet, nothing else we do will matter because Earth is the only home we have. B20 biofuel makes a significant contribution to ensuring the survival of our species, one drop at a time. Join us!

info@neutralfuels.com | www.neutralfuels.com
Follow us on Facebook, Instagram and LinkedIn



Neutral Fuels

