


## FOODDUTY™

FoodDuty™ is an incidental food contact grease with a base oil component that is 100% pure white oil. Using GreaseCo's calcium sulfonate thickener, this grease provides exceptional properties with only a minimal additive package... allowing the grease to have NSF H1, Kosher, and Halal registrations.

FoodDuty™ provides excellent lubrication for a variety of medium and heavy-duty uses. It also provides protection from corrosion while equipment is idle or in storage.



## PERFORMANCE DASHBOARD

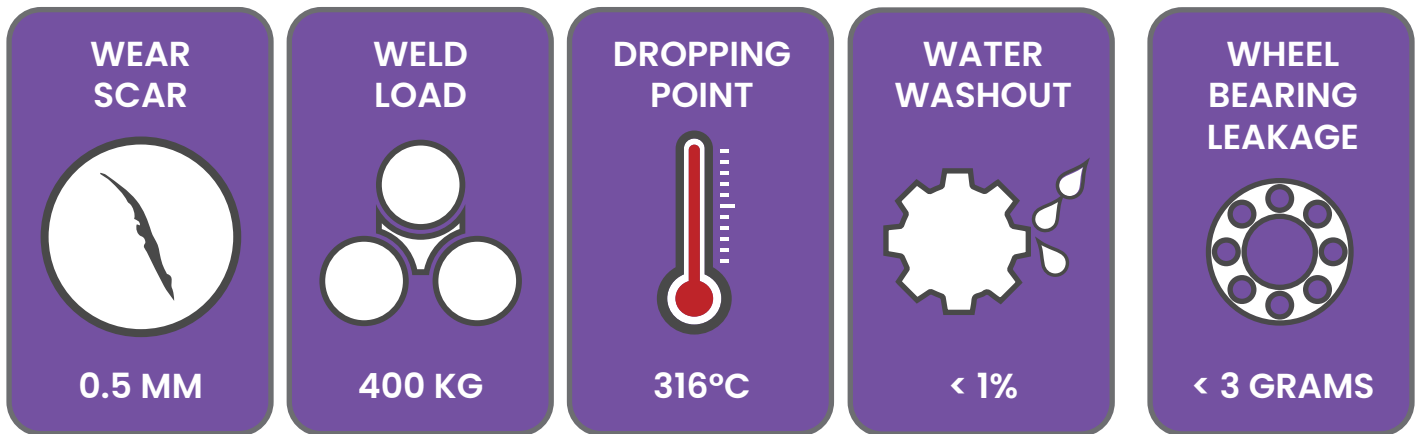

### HEALTH AND SAFETY

Based on available information, this product is not expected to produce adverse effects on health when used for the intended application and the recommendations provided in the Safety Data Sheet (SDS) are followed. SDS's are available upon request through your sales contract office, or via the Internet. This product should not be used for purposes other than its intended use.

If disposing of used product, take care to protect the environment. As with all cleaning and maintenance procedures, run-off from the cleaning or maintenance process should be diverted into a collection vessel and not allowed to soak into the ground or enter a storm sewer. If this product is spilled or contaminated and cannot be used, creating the need for disposal, wipe up or scrape up product and deposit in a sealable container. Thoroughly clean area with detergent solutions and rinse well with water.

#### **⚠️ WARNING!**

Prolonged or repeated skin contact may cause irritation. Use protective wear to avoid eye and skin contact. Wash thoroughly after use. For skin contact, wash with soap and water. If swallowed, seek medical attention immediately. For eye contact, flush with water for 15 minutes and contact a physician. For additional information read the Safety Data Sheet for this product. **KEEP OUT OF REACH OF CHILDREN.**

### TECHNICAL DATA

TEST	METHOD	FOODDUTY™
NLGI	DATA	2
COLOR	DATA	OFF-WHITE
THICKENER	DATA	CALCIUM SULFONATE
TEXTURE	DATA	SMOOTH
VISCOSITY @ 40 cSt	ASTM D-445	220
TIMKEN LOAD, kg	ASTM D-2509	25
WELD LOAD, kg	ASTM D-2596	400
DROPPING POINT, °C	ASTM D-2265	316
BASE OIL TYPE	DATA	WHITE OIL
WATER WASHOUT 175F %	ASTM D-1264	< 1
RUST TEST	ASTM D-1743	PASS
COPPER CORROSION	ASTM D-4048	1b
WHEEL BEARING LEAKAGE, GRAMS	ASTM D-4290	< 3
4 BALL WEAR SCAR, MM	ASTM D-2266	0.5
VISCOSITY INDEX	ASTM D-445	99.7

### AVAILABLE PACKAGING SIZES

