

## KE1220

LINE PROTECTOR – 3 PIECE - WITH PINS – 36” L




### KEY FEATURES:

- IEEE 1656 & ASTM Tested
- V-0 Flammability Classification
- UV Resistant
- Provides up to 36” of Line Coverage
- Locking pins Secure long term coverage
- Minimum 30 Degree flex, both horizontal and vertical
- Graduated ends to accommodate various conductor sizes

### BIRDCUARD™ PRODUCTS DELIVER A TRIPLE WIN:

- 
1. Reliability for Customers
  2. Utility Asset Sustainability
  3. Positive Environmental Impact

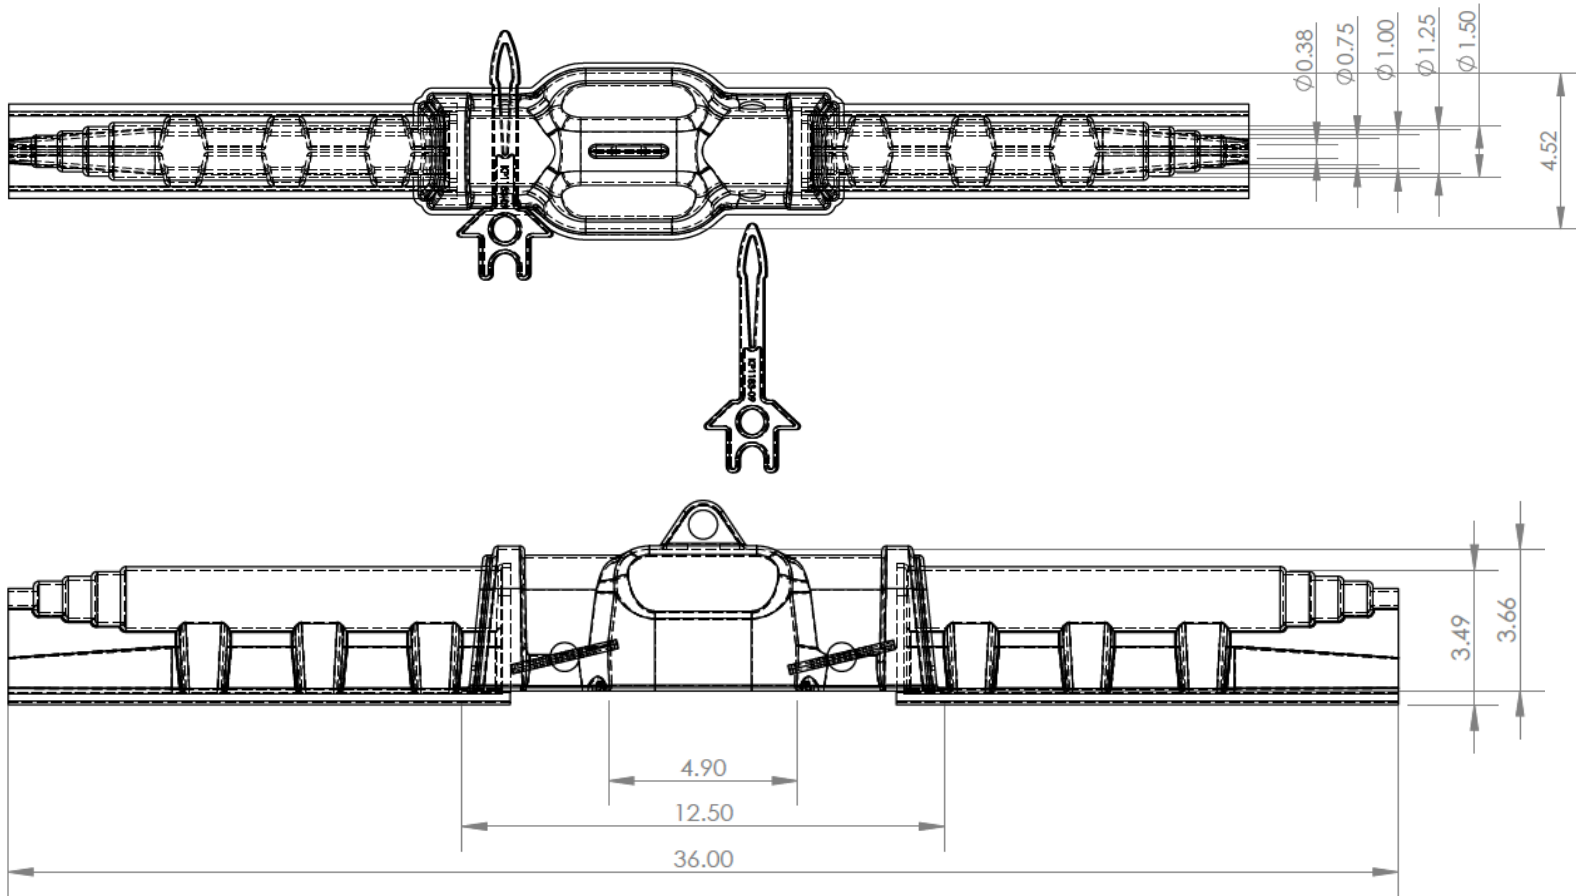

## MATERIAL TESTING INFORMATION

ASTM TEST	DESCRIPTION	SPECIFICATIONS
ELECTRICAL DIELECTRIC STRENGTH	D-149-09 (TESTED IN OIL)	PASS > 49KV
ELECTRICAL DIELECTRIC STRENGTH	D-149-09 (TESTED IN AIR)	PASS > 72KV
TRACKING	D-3638-12	PASS
TENSILE STRENGTH	D-638-10 (BEFORE EXPOSURE)	6570 PSI
TENSILE STRENGTH	D-638-10 (AFTER XENON ARC EXPOSURE)	6480 PSI
TENSILE IMPACT	D-1822-13 (BEFORE EXPOSURE)	78.4 FT-LBS/IN SQ
TENSILE IMPACT	D-1822-13 (AFTER XENON ARC EXPOSURE)	69.3 FT-LBS/IN SQ
FLAMMABILITY	D-3801 (UL94)	PASS V-0