

2020

ALT ENTERPRISES

Advanced LED Technology

Heavy-Duty Truck Signal Lighting Products

Multi-Purpose LED Work Lights

**Emergency Warning Lights For:
DOT Trucks, School Buses, Utility Work Trucks**



ALT ENTERPRISES
ADVANCED LED TECHNOLOGY



WWW.ALT-ENT.COM



ALT Enterprises

carries out research and development on LED lighting technology for heavy-duty trucks, automobiles, interior and exterior warning signals and other high intensity lighting systems. We specialize in providing custom and standard optoelectronic products for customers worldwide. Our patented technology and years of design experience, combined with a self-owned R&D research/design center and manufacturing site (DAR TÜV certified ISO9001) in China, allows us to offer world leading technology products at very competitive prices.

Why Select ALT Enterprises Products

Quality assurance with our self-owned ISO9001 (DAR TÜV-Certified) manufacturing site includes:

DESIGN

- 5 hours of component testing at $-35^{\circ}\text{C}/0^{\circ}\text{F}$ for low temperature restart tested
- 200 hours continues operation at $65^{\circ}\text{C}/148^{\circ}\text{F}$ for high temperature reliability tested
- 10G vibration tested
- Weather pack connectors to prevent corrosion
- Sonic weld, potted circuit boards to prevent leakage
- Polycarbonate material

LIGHT OUTPUT

- Our advanced LED technology is the brightest and most reliable LED lighting.

QUALITY ASSURANCES

- 100% of products prior to assembly undergo a 100 hours age test
- 100% photometric point check on all products

WARRANTY

- Limited lifetime (please see warranty details)

To order ALT Enterprises products please call our toll-free number

(844) 406-6818, or fax **(844) 881-6816 & (888)774-9793**



MULTI-PURPOSE LED WORK LIGHTS



To order product, call our toll-free number
1-844-406-6818 or fax: 1-844-881-6816 & efax: 1-888-774-9793
email: sales@alt-ent.com
www.alt-ent.com

Mini High Intensity Aluminum Alloy Housing Multi-Purpose LED Work Light


Specifications:

High intensity LED heavy-duty work light features a sealed, water-resistant (IP67 rated), tempered glass or PC lens, aluminum alloy housing with a 1ft heavy-duty cord.

Operating Voltage: 12V-24V DC(10-30Volts)


Order Number:

W0402500: 2.6" Square, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, tempered glass lens, Operating Current: <1.00 Amps (tested at 12.8V), Spot Beam, **900 Lumen**** Output.

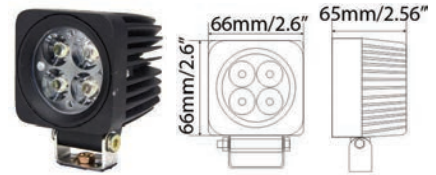

Order Number:

W0402520: 3" Square, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, PC* lens Operating Current: <1.00 Amps (tested at 12.8V) Spot Beam, **950 Lumen**** Output.

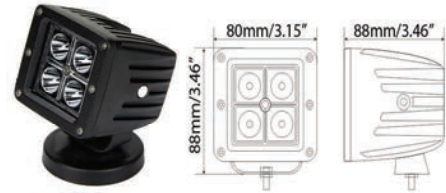

Order Number:

W0204500: 4" Oval, 20 Watts ,White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, PC* lens Spot Beam, **2000 Lumen**** Output.




W0204510: 4" Oval, 20 Watts ,White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, PC* lens Flood Beam, **2000 Lumen**** Output.



Order Number:

W0403500: 3" Round, 12 Watts ,White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, PC* lens Spot Beam, **1100 Lumen**** Output.



Oval High Intensity Aluminum Alloy Housing Multi-Purpose LED Work Light

Specifications:

High intensity LED heavy-duty work light features a sealed, water-resistant (IP67 rated), PC* lens, aluminum alloy housing with a 1ft heavy-duty cord.

Operating Voltage: 12V-24V DC (10-30Volts)

Operating Current: <1.40Amps (tested at 12.8V)


Operating Temperature-40C°- 85C°

Beam Type: Spot beam 30°

Order Number:

W0606500: 6.3" Oval, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Spot beam, **1450 Lumen**** Output.

W0606510: 6.3" Oval, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Flood beam, **1450 Lumen**** Output.



**Listed maximum lumen output is based on individual LED lab test results. Actual lumen output may vary.

Par36 High Intensity Aluminum Alloy Housing Multi-Purpose LED Work Light

Specifications:

High intensity LED heavy-duty work light features a sealed, water-resistant (IP67 rated), PC* lens, aluminum alloy housing with a 1ft heavy-duty cord.

Operating Voltage: 12V-24V DC (10-30Volts)

Operating temperature-40C° - 85C°

Order Number:

W0604500: Par36 18 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Spot Beam, **1350 Lumen**** Output. <1.33 Amps (tested at 12.8V)

W0604510: Par36 18 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Flood Beam, **1350 Lumen**** Output. <1.33 Amps (tested at 12.8V)

W0904500: Par36 27 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Spot Beam, **2150 Lumen**** Output. <2.25 Amps (tested at 12.8V)

W0904510: Par36 27 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Flood Beam, **2150 Lumen**** Output. <2.25 Amps (tested at 12.8V)

Order Number:

W1404500: Par36 42 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Spot Beam, **3500 Lumen**** Output. <3.50 Amps (tested at 12.8V)

W1404510: Par36 42 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Flood Beam, **3500 Lumen**** Output. <3.50 Amps (tested at 12.8V)



4" Square High Intensity Aluminum Alloy Housing Multi-Purpose LED Work Light

Specifications:

High intensity LED heavy-duty work light features a sealed, water-resistant (IP67 rated), PC* lens, aluminum alloy housing with a 1ft heavy-duty cord. Operating Voltage: 12V-24V DC (10-30Volts) Beam Type: Spot beam 30°, flood beam 60°

Order Number:

W0504500: 15 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Spot Beam, **1200 Lumen**** Output.<1.25 Amps (tested at 12.8V)

W0504510: 15 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Flood Beam, **1200 Lumen**** Output.<1.25 Amps (tested at 12.8V)

W0904520: Par36 27 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Spot Beam, **2150 Lumen**** Output.<2.25 Amps (tested at 12.8V)

W0904530: Par36 27 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Flood Beam, **2150 Lumen**** Output. <2.25 Amps (tested at 12.8V)



5.8" Oval High Intensity Aluminum Alloy Housing Multi-Purpose LED Work Light

Specifications:

High intensity LED heavy-duty work light features a sealed, water-resistant (IP67 rated), PC* lens, aluminum alloy housing with 1ft heavy-duty cord.

Operating Voltage: 12V-24V DC (10-30Volts)

Operating Current: <2.25 Amps (tested at 12.8V) **2400 Lumen**

Operating Temperature-40C°- 85C°

Beam Type: Spot beam 30°, flood beam 60°

Order Number:

W0905500: 27 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Spot Beam, **2400 Lumen**** Output.

W0905510: 27 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Flood Beam, **2400 Lumen**** Output.



5.5" Round High Intensity Aluminum Alloy Housing Multi-Purpose LED Work Light

Specifications:

High intensity LED heavy-duty work light features a sealed, water-resistant (IP67 rated), PC* lens, aluminum alloy housing with a 1ft heavy-duty cord.

Operating Voltage: 12V-24V DC (10-30Volts)

Operating Temperature-40C°- 85C°

Beam Distance: 10° Spot beam 400m L X 10m W, flood Beam 50m L X 20m W

Order Number:


W0905520: 45 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Spot Beam, **3800 Lumen**** Output. <3.75 Amps (tested at 12.8V)

W0905530: 45Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Flood Beam, **3800 Lumen**** Output. <3.75 Amps (tested at 12.8V)



Order Number:

W1205520: 36 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing with on/off switch, handle bar included, Spot Beam, **2600 Lumen**** Output. <3.00 Amps (tested at 12.8V)

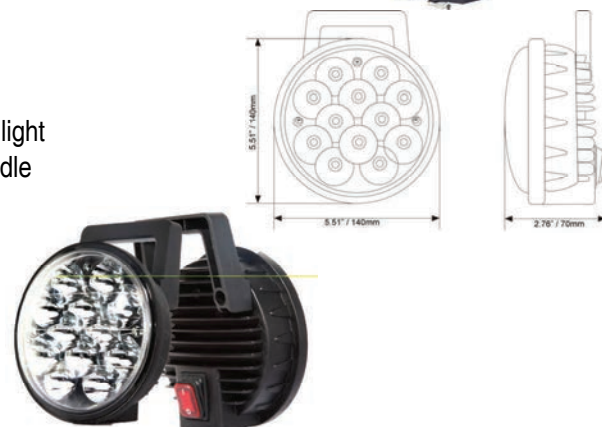

****Listed maximum lumen output is based on individual LED lab test results. Actual lumen output may vary.**

7" Round High Intensity Aluminum Alloy Housing Multi-Purpose LED Work Light

Specifications:

Ultrahigh intensity LED heavy-duty work light features a sealed, water-resistant (IP67 rated), tempered glass lens, aluminum alloy housing with a 1ft heavy-duty cord.

Operating Voltage: 12V-24V DC (10-30Volts)

Operating Current: <3.80 Amps (tested at 12.8V)

Operating Temperature-40C°- 85C°

Order Number:

W1707500: 7" Round, White Ultra High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Spot Beam, 3700 Lumen** Output. Handle Bar Included.



5" Square High Intensity Aluminum Alloy Housing Multi-Purpose LED Work Light

Specifications:

High intensity LED heavy-duty work light features a sealed, water-resistant (IP67 rated), PC* lens, aluminum alloy housing with a 1ft heavy-duty cord.

Operating Voltage: 12V-24V DC (10-30Volts)

Operating Current: <4.00 Amps (tested at 12.8V) **3800**Lumen

Operating Temperature-40C°- 85C°

Beam Type: Spot beam 30°, flood beam 60°

Order Number:

W1605500: 48 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Spot Beam, **3800** Lumen** Output.

W1605510: 48 Watts, White High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Flood Beam, **3800** Lumen** Output.



Multi-Purpose Rechargeable LED Work Light

Specifications:

High intensity LED heavy-duty work light. Features a sealed, water-resistant (IP67 rated) 30 Watts consumption.

Package includes 12V cig-plug charger wire and 110 V-240V AC charger. Up to 8 hour use time (actual working time may vary based on work environment, battery age).

Operating Voltage:12VDC (10-14Volts). Operating temperature: -35C°- 45C°, Beam Type: flood beam.

Features:

Designed for commercial or personal use. Built in stand rack allows the light to working at any angle. Light functions as steady-burn full light output.

Order Part Number:

W3010510:

RECHARGEABLE WORK LIGHT, FLOOD BEAM, 30 WATTS, CIG PLUG 12VDC CHARGE AND 110V-240V AC CHARGER.



Agriculture Vehicle Replacement LED Headlight

Specifications:

High intensity LED light features a sealed, water-resistant (IP67 rated), PC* lens, aluminum alloy housing with a 1ft heavy-duty cord. Available in both flush mount and bracket mount. Vibration resistant design for agriculture vehicle applications.

Operating Voltage: 12V-24V DC (10-30Volts)

Operating Temperature-40C°- 85C°

Order Number:

W0406510: 5.5" Rectangular, Super High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Flood Beam, 20 Watts **1450** Lumen** Output. Clear PC lens.

W0406100: 5.5" Rectangular, Super High Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Spot Beam, 20 Watts **1450** Lumen** Output. Amber PC lens.



Seal Beam Headlamp Replacement LED Driving Light

Specifications:


High intensity LED light features a sealed, water-resistant (IP67 rated), PC* lens, aluminum alloy housing with a standard connector. Vibration resistant design for off road vehicle application. Fits any seal beam headlight housing.

Operating Voltage: 12V-24V DC (10-30Volts)

Operating Temperature-40C°- 85C°

Order Number:

W1205500: Par 46, 5.5" Round, Ultra High Intensity LED Light With Black Painted Aluminum Alloy Housing, Build-In Dual Beam, 36 Watts **2710** Lumen** Output. Clear PC lens.

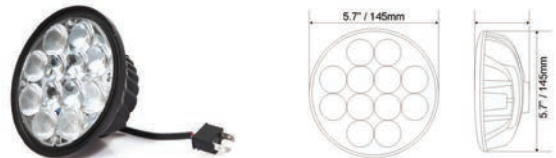

Order Number:

W1506500: 4X6" Ultra High Intensity LED Light With Black Paint Aluminum Alloy Housing, Build-In Dual Beam, 45 Watts **3200** Lumen** Output. Clear PC lens. Individual Mounting Housing Included.



**Listed maximum lumen output is based on individual LED lab test results. Actual lumen output may vary.

High Power Round Shape Multi-Purpose LED Work Light

Specifications:

Ultrahigh intensity heavy-duty LED light. Features a sealed, water-resistant (IP67 rated), PC* lens, aluminum alloy housing with a 1ft heavy-duty cord.

Operating Voltage: 12V-24V DC (10-30Volts)

Operating Temperature-40C°- 85C°

Beam Type: Spot beam 30°, flood beam 60°

Order Number:

W0405500: 40 Watts, 5" Round White Ultrahigh Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Spot Beam, **3500 Lumen**** Output.

W0405510: 40 Watts, 5" Round White Ultrahigh Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Flood Beam, **3500 Lumen**** Output.



W0706500: 70 Watts, 6" Round White Ultrahigh Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Spot Beam, **7000 Lumen**** Output.

W0706510: 70 Watts, 6" Round White Ultrahigh Intensity LED Heavy-Duty Work light with Black Painted Aluminum Alloy Housing, Flood Beam, **7000 Lumen**** Output.



Dual Beam High Intensity Aluminum Alloy Housing Multi-Purpose LED Work Light

Specifications:

High intensity LED heavy-duty work light. Features a sealed, water-resistant (rate IP67), PC* lens, aluminum alloy housing with a 1ft heavy-duty cord. Dual Beam, three wires to function each beam on individual or together.

Operating Voltage: 12V-24V DC (10-30Volts)

Operating Temperature-40C°- 85C°

Beam Type: Can be used as a spot beam 30° a flood beam 60°, or a combination of the two.

Order Number:	L	Beam	Watts	Lumen Output
W1204500:	4"	Spot&Flood	36W	1500X2 (3,000)
W2406500:	6.5"	Spot&Flood	72W	3000X2 (6,000)
W3609500:	9"	Spot&Flood	108W	4500X2 (9,000)
W4812500:	12"	Spot&Flood	144W	6000X2 (12,000)
W7217500:	17"	Spot&Flood	216W	9000X2 (18,000)

Caution: Large Size LED Bar Request Order has a 2-4 Week Lead Time.



Low Profile Ultra High Intensity Multi-Purpose LED light Work Light & Bar


Specifications:

Ultra high intensity LED heavy-duty work light. Features a sealed, water-resistant (IP67 rated), PC lens, aluminum alloy housing with a 1ft heavy-duty cord. Spot / Flood / Combination beam, White, amber or White + Amber. Amber color can function as fog light, turn signal or warning light. (Flood beam lens and amber color lens provided in package)

Operating Voltage: 12V-48V DC

Operating Temperature -40°C - 85°C

Order Number:	L	Watts	Lumen Output
W0306500:	6"	30W	2400
W0611500	12"	60W	4800
W0611510	12"	60W	4800
W1222500	22"	120W	9600

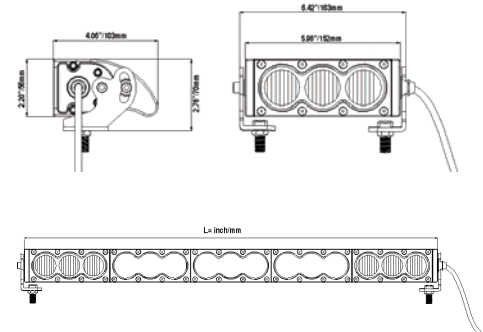

Caution: Package Includes a Spot, Flood Beam And Amber Color Lens For Customer Self Exchange. Large Size LED Bar and Custom Mix Beam Request Order has a 2-4 Week Lead Time.



Low Profile Ultrahigh Intensity Curve Shape LED Light Bar

Specifications:

Ultrahigh intensity LED. Features a sealed, water-resistant (IP67 rated), PC* lens, aluminum alloy housing. Designed for off road & work truck driving & area lighting. Curve bar housing is designed to fit most vehicle top and front bumper shapes.


Operating Voltage: 12V-24V DC (10-30Volts)

Operating Temperature -40°C - 85°C

Beam Type: Spot beam 30°, flood beam 60°

Order Number:	L	Beam	Watts	Lumen Output	D	Ht	H	W	W (mounting size)
W2413500:	13"	Spot	72 W	5040	3.56"/90.5mm	4.72"/120mm	2.97"/75.5mm	14.21"/361mm	1 5.67"/398mm
W2413510:	13	Flood	72 W	5040	3.56"/90.5mm	4.72"/120mm	2.97"/75.5mm	14.21"/361mm	1 5.67"/398mm
W6033580:	33"	Combo	180 W	11450	4.37"/111mm	4.72"/120mm	2.97"/75.5mm	32.41"/823.3mm	33.8"/858.4mm
W8042580:	42"	Combo	240 W	16500	5.12"/130mm	4.72"/120mm	2.97"/75.5mm	42.40"/1077mm	43.7"/1110mm
W9650580:	50"	Combo	288 W	19200	5.87"/149mm	4.72"/120mm	2.97"/75.5mm	47.56"/1208mm	51.67"/1312.5mm

Caution: Standard Combo Beam Comes with a Build-In 1/3 Spot Lens and 2/3 Flood Lens. Large Size LED Bar and Custom Mix Beam Request Order is available. Requires 2-4 week lead time.

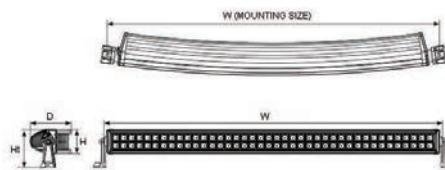

****Listed maximum lumen output is based on individual LED lab test results. Actual lumen output may vary.**

Low Profile Ultrahigh Intensity Multi-Purpose LED light Bar

Specifications:


Ultrahigh intensity LED. Features a sealed, water-resistant (IP67 rated), PC* lens, aluminum alloy housing. Designed for off road & work truck driving & area lighting.

Operating Voltage: 12V-24V DC (10-30Volts)

Operating Temperature-40C°- 85C°

Beam Type: Spot beam 30°, flood beam 60°

Order Number:	L	Beam	Watts	Lumen Output
W0205500:	5"	Spot	20 W	1350
W0205510:	5"	Flood	20 W	1350
W0408500:	8"	Spot	40 W	2700
W0408510:	8"	Flood	40 W	2700
W0611500:	11"	Spot	60 W	4050
W0611510:	11"	Flood	60 W	4050
W1017500:	17"	Spot	100 W	6750
W1017510:	17"	Flood	100 W	6750
W1220500:	20"	Combo	120 W	8100
W2439500:	39"	Combo	240 W	19200

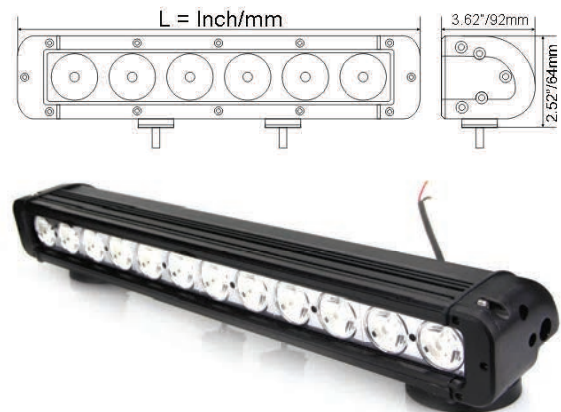

Caution: Standard Combo Beam Comes with a Build-In 1/3 Spot Lens and 2/3 Flood Lens. Large Size LED Bar and Custom Mix Beam Request Order is available. Requires 2-4 Week Lead time.

LED Work Light Accessories

Order Number:

W0001004: 1.5 inch Tube mounting bracket for most of our LED work light to tubes



W0001005: 2.0 inch Tube mounting bracket for most of our LED work light to tubes



W0001006: Shelf Bracket, Retractable bracket can be mounted to both LED work lights or bars. (lights in picture are not included)



W0001008: 16' / 5m wire harness with 20 A fuse, DT connector and On/Off switch.



Red STT & Amber Signal Light Kit

- Convex optical lens technology provides light output at all angles
- Entire lens illuminates, unlike regular LED dot look
- Sonic welded optical lens to housing, weather-pack wire harness
- Potted circuitry and a lifetime warranty makes this the best possible

Heavy-Duty Truck STT Signal Lights



Elite Series 4" Round LED Red STT/Amber Turn Light and Light Kit

Order Number

T1901120: Elite Series Amber 4" Round Turn Signal Light, CONVEX LENS

T1901125: Elite Series Amber 4" Round Turn Signal Light, CONVEX LENS, 8" Wire harness, PVC Grommet
8" Wire Harness, PVC Grommet


T1901126: Elite Series Amber 4" Round STT Signal Light, CONVEX LENS, 8" Wire Harness, Stainless Flange Ring
8" Wire Harness, Stainless Flange Ring

T1901320: Elite Series Red 4" Round STT Signal Light, CONVEX LENS

T1901325: Elite Series Red 4" Round STT Signal Light, CONVEX LENS, 8" Wire Harness, PVC Grommet

T1901326: Elite Series Red 4" Round STT Signal Light, CONVEX LENS, 8" Wire Harness, Stainless Flange Ring

T1910053: 4" Round Stainless Snap-in Ring



Elite Series 6" Oval LED Red STT/Amber Turn Light and Light Kit

Order Number

T1903120: Elite Series Amber 6" Oval Signal Light, CONVEX LENS


T1903125: Elite Series Amber 6" Oval Signal Light, CONVEX LENS, 8" Wire Harness, Rubber Grommet

T1903126: Elite Series Amber 6" Oval Signal Light, CONVEX LENS, 8" Wire Harness, Stainless Flange Ring

T1903320: Elite Series Red 6" Oval Signal Light, CONVEX LENS

T1903325: Elite Series Red 6" Oval Signal Light, CONVEX LENS, 8" Wire Harness, Rubber Grommet


T1903326: Elite Series Red 6" Oval Signal Light, CONVEX LENS, 8" Wire Harness, Stainless Flange Ring

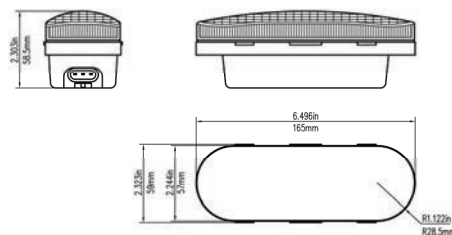

4" Round LED Red STT/Amber Turn Light Head (Series 40)

Order Number

- T1901100:** 12V, Amber Turn Light Head
- T1901104:** 12V, Amber Turn Light Head and Harness
- T1901181:** 12V-24V, Amber Turn Light Head
- T1901182:** 12V-24V, Amber Turn Light Head Harness
- T1901300:** 12V, Red, STT Light Head
- T1901304:** 12V, Red, STT Light Head and Harness
- T1901381:** 12V-24V, Red, STT Light Head
- T1901382:** 12V-24V, Red, STT Light Head and Harness

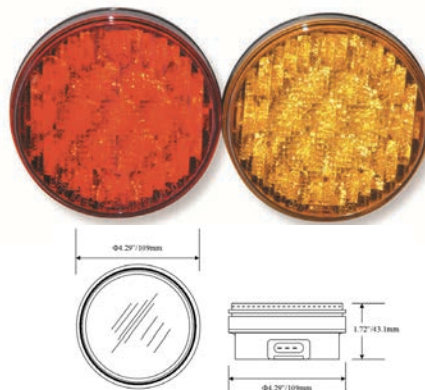

4" Round LED Red STT/Amber Turn Light Kit (Series 40)

Kit includes: one 4" round LED light head, heavy-duty oil resistant rubber grommet and weatherproof harness.

Order Number

- T1901105:** 12V, Amber Turn Light, PVC Grommet and Harness
- T1901184:** 12V-24V, Amber Turn Light, PVC Grommet and Harness
- T1901305:** 12V, Red, STT Light, PVC Grommet and Harness.
- T1901384:** 12V-24V, Red, STT Light, PVC Grommet and Harness
- T1901481:** 12V-24V, Green Color LED, Accessory and Signal Light, PVC Grommet and Harness



4" LED Red STT/Amber Turn Light Kit (Series 40)

Kit includes: one 4" round LED light head, anti-theft stainless flange ring and weatherproof harness.

Order Number


- T1901106:** 12V, Amber Turn Light, Stainless Flange Ring and Harness
- T1901186:** 12V-24V, Amber Turn Light, Stainless Flange Ring and Harness
- T1901306:** 12V, Red STT Light, Stainless Flange Ring and Harness
- T1901386:** 12V-24V, Red STT Light, Stainless Flange Ring and Harness



6" Oval LED Red STT/Amber Turn Light Head (Series 60)

Order Number

- T1903100:** 12V, Amber Turn Light Head
- T1903110:** 12V, Amber LED, Clear Lens, Turn Light Head
- T1903181:** 12V-24V, Amber Turn Light Head
- T1903300:** 12V, Red STT Light Head
- T1903310:** 12V, Red LED, Clear Lens STT Light Head
- T1903381:** 12V-24V, Red STT Light Head

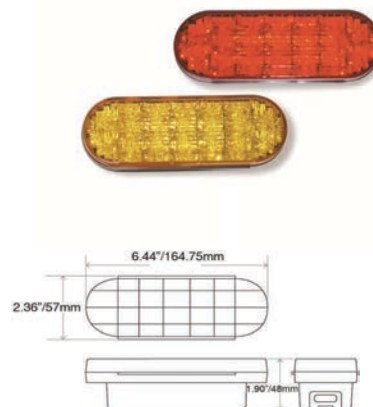


6" Oval LED Red STT/Amber Turn Light Kit (Series 60)

Kit includes: one 6" oval LED light head, heavy-duty PVC grommet and weatherproof harness.



Order Number

- T1903104:** 12V, Amber Turn Light and Harness
- T1903105:** 12V, Amber Turn Light, PVC Grommet and Harness
- T1903175:** 12V-24V, Amber Turn Light, PVC Grommet and Harness
- T1903304:** 12V, Red STT Light and Harness
- T1903305:** 12V, Red STT Light, PVC Grommet and Harness
- T1903375:** 12V-24V, Red STT Light, PVC Grommet and Harness




6" Oval LED Red STT/Amber Turn Light Kit (Series 60)

Kit includes: one 6" oval LED light head, anti-theft stainless flange ring and weatherproof harness.

Order Number

- T1903106:** 12V, Amber Turn Light, Stainless Flange Ring and Harness
- T1903176:** 12V-24V, Amber Turn Light, Stainless Flange Ring and Harness
- T1903306:** 12V, Red STT Light, Stainless Flange Ring and Harness
- T1903376:** 12V-24V, Red STT Light, Stainless Flange Ring and Harness



4" Round and 6" Oval LED White Backup Light Head (Series 40 and 60)

Order Number

T1901590: 12V-24V, 4" Round White Backup Light Head

T1903590: 12V-24V, 6" Oval White Backup Light Head

T1903520: 12V-24V, 6" Oval White Backup Light Head, CONVEX LENS



4" Round and 6" Oval LED White Backup Light Kit (Series 40 and 60)



Order Number

T1901595: 12V-24V, 4" Round, White Backup Light, PVC Grommet and Harness

T1903595: 12V-24V, 6" Oval, White Backup Light, PVC Grommet and Harness

T1903525: 12V-24V, 6" Oval, White Backup Light, CONVEX LENS, PVC Grommet and Harness

4" Round and 6" Oval LED White Backup Light Kit (Series 40 and 60)

Order Number

T1901596: 12V-24V, 4" Round, White Backup light, Stainless Flange Ring and Harness

T1903596: 12V-24V, 6" Oval, White Backup light, Stainless Flange Ring and Harness

T1903526: 12V-24V, 6" Oval, White Backup light, CONVEX LENS, Stainless Flange Ring and Harness



4" Round "CLEAR LENS SERIES" LED Red STT/Amber Turn Light

Order Number


T1901110: 12V, Clear Lens, Amber, Turn Light Head

T1901115: 12V, Clear Lens, Amber, Turn Light, PVC Grommet and Harness

T1901116: 12V, Clear Lens, Amber, Turn Light, Stainless Flange Ring and Harness

T1901310: 12V, Clear Lens, Red, STT Light Head

T1901315: 12V, Clear Lens, Red, STT Light, PVC Grommet and Harness

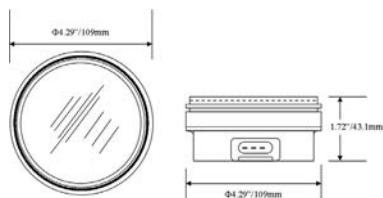

6" Oval "CLEAR LENS SERIES" LED Red STT/Amber Turn Light

Order Number

T1903110: 12V, Clear Lens, Amber, Turn Light Head


T1903115: 12V, Clear Lens, Amber, Turn Light, PVC Grommet and Harness

T1903116: 12V, Clear Lens, Amber, Turn Light, Stainless Flange Ring and Harness

T1903310: 12V, Clear Lens, Red, STT Light Head

T1903315: 12V, Clear Lens, Red, STT Light, PVC Grommet and Harness

T1903316: 12V, Clear Lens, Red, STT Light, Stainless Flange Ring and Harness

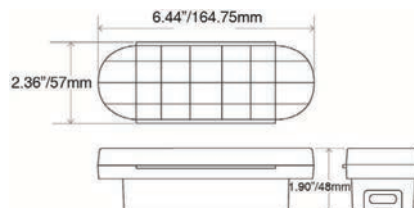

6" Oval Slim LED STT/ Turning & Combination Back Up Light

Order Number

T1606100: 12V, Amber, LED Turn Light Head

T1606105: 12V, Amber, LED Turn Light, PVC Grommet and Harness

T1606106: 12V, Amber, Turn Light, Stainless Flange Ring and Harness

T1606300: 12V, Red, LED STT Light Head


T1606305: 12V, Red, LED STT Light, PVC Grommet and Harness

T1606306: 12V, Red, LED STT Light, Stainless Flange Ring and Harness

T1606350: 12V, Red, LED STT & White Back Up Combination Light Head.

T1606355: 12V, Red, LED STT & White Back Up Combination Light, PVC Grommet and Harness

T1606306: 12V, Red, LED STT & White Back Up Combination Light, Stainless Flange Ring and Harness



3" x 5" Rectangular LED Red STT/Amber Turn Light Head (Series 45)

Design for either Horizontal or Vertical Mounting


Order Number

T2405100: 12V, Amber Turn Light Head

T2405110: 12V-24V, Amber Turn Light Head

T2405300: 12V, Red STT Light Head

T2405310: 12V-24V, Red STT Light Head

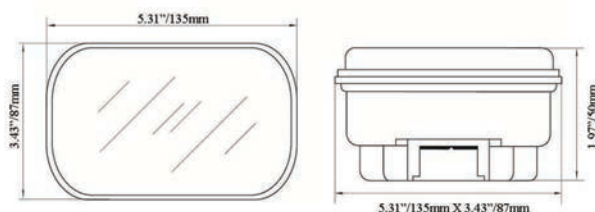

3"x 5" Rectangular LED Red STT/Amber Turn Light Kit (Series 45)

Kit includes: one 3"x 5" LED light head, heavy-duty oil resistant rubber grommet and weatherproof harness.

Order Number

T2405105: 12V, Amber Turn Light, PVC Grommet and Harness


T2405115: 12V-24V, Amber Turn Light, PVC Grommet and Harness

T2405305: 12V, Red STT Light, PVC Grommet and Harness

T2405315: 12V-24V, Red STT Light, PVC Grommet and Harness

T2410002: 3X5-MG: 3"X5" MOUNTING PVC GROMMET

T2410004: AWC-3W-MC-PC; THREE WIRE ADAPTER WITH WEATHER APP MALE CONNECTOR

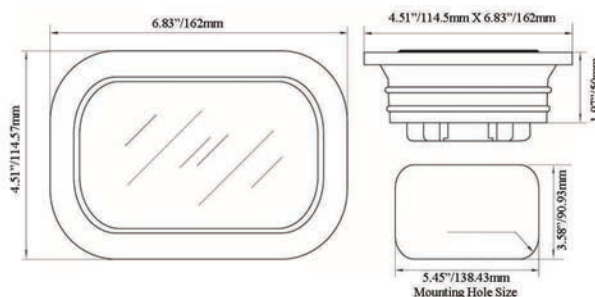

4" Slim Line Digital LED Side Marker Light


Order Number

T0305100: 12V Amber, Marker Light


T0305300: 12V Red, Marker Light

T0305101: 12V Amber, Marker Light, Wire Harness

T0305301: 12V Red, Marker Light, Wire Harness

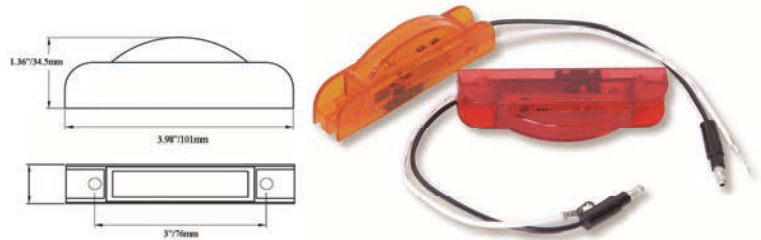


4" Slim Line ID Bar

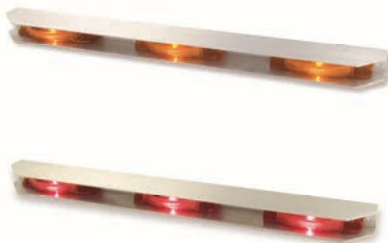

Order Number

T0305110: Aluminum Bar with 12V 4" Slim Line Amber, Marker Light

T0305310: Aluminum Bar with 12V 4" Slim Line Red, Marker Light

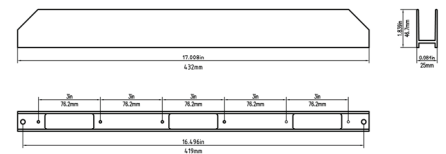

Armor Bracket for 4" Slim Line Marker Light

Order Number

T0305020: Signal Aluminum Protection Bar for 4" Slim Line Side Marker. (Light sold separately)




Tri-Angle Bus Marker Light

Features a sealed, water-resistant, polycarbonate optical lens and housing.

Order Number

T0401100: Amber LED, Bus Marker Light

T0401300: Red LED, Bus Marker Light



2" Round Multi-Diode Digital LED Side Marker Light (Series 30)

Order Number

T0301140: 12V Amber, Multi-Diode Light Head

T0301141: 12V Amber, Multi-Diode Marker Light, PVC Grommet and Harness

T0301340: 12V Red, Multi-Diode Light Head



2" Round I LED Side Marker Light (Series 30)



Order Number

T0301100: 12V, Amber, Light Head

T0301300: 12V, Red, Light Head

T0301101: 12V Amber, Marker Light, PVC Grommet and Harness

T0301301: 12V Red, Marker Light, PVC Grommet and Harness



2 1/2" Round Multi-Diode LED Side Marker Light (Series 10)

Order Number

T0302140: 12V Amber, Multi-Diode Light Head

T0302141: 12V Amber, Multi-Diode Marker Light, 2.91" PVC Grommet and Harness

T0302340: 12V Red, Multi-Diode Light Head

T0302341: 12V Red, Multi-Diode Marker Light, 2.91" PVC Grommet and Harness



2 1/2" Round Digital LED Side Marker Light (Series 10)



Order Number

T0302100: 12V, Amber, Light Head

T0302300: 12V, Red, Light Head

T0302101: 12V Amber, Marker Light, PVC Grommet and Harness

T0302301: 12V Red, Marker Light, PVC Grommet and Harness

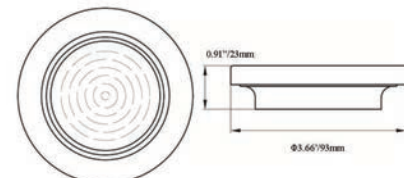


2 1/2" Rectangle LED Side Marker, High Mount Stop Lights (Series 15)

Order Number


T0306100: 12V Amber, Marker Light

T0306300: 12V Red, Marker Light

T0406300: 12V. Center High Mount Clearance and Stop Lamp



2 1/2" Rectangle ID Bar

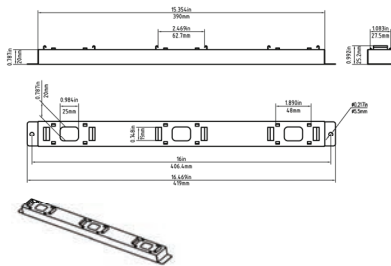

Order Number

T0306110 Stainless Bar with Three 12V DC Amber Side Marker Lights, Weatherproof Connector

T0306310 Stainless Bar with Three 12V DC Red Side Marker Lights, Weatherproof Connector


2" Round Digital LED Side Marker ID Bar

Order Number

T0301110: Stainless Steel Bar with Three 12V 2" Amber Marker Lights, Weatherproof Connector

T0301310: Stainless Steel Bar with Three 12V 2" Red Marker Lights, Weatherproof Connector

T0302110: Stainless Steel Bar with Three 12V 2 1/2" Amber Marker

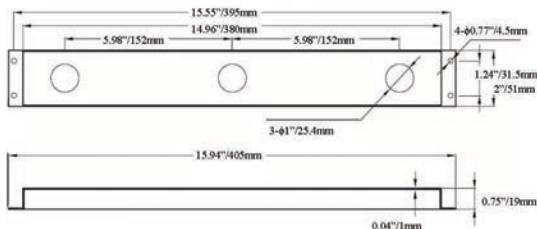

3/4" Round Visual Splendor Side Marker & Center High Mount Stop

New 3/4" round that meets or exceeds SAE specifications for high mount lamp. Dual function clearance and stop lamps. Designed to fit applications requiring minimal space.

Order Number

T0201310: 3/4" round, Center High Mount Clearance Marker and Stop Lamp, 12VDC, open end wire.

T0201311: 3/4" round, Center High Mount Clearance Marker and Stop Lamp, 12VDC, with 8" wire bullet head connector, stainless steel cover ring.

T0201312: 3/4" round, Center High Mount Clearance Marker and Stop Lamp, 12VDC, Clear lens, with 8" wire bullet head connector, stainless steel cover ring.

T0201100: 3/4" round, Amber color marker light, 12VDC, PVC grommet with 8" wire open end

T0201101: 3/4" round, Amber color marker light, 12VDC, PVC grommet with 8" wire bullet head connector, stainless steel cover ring.

T0201102: 3/4" round, Clear Lens, Amber color marker light, 12VDC, PVC grommet with 8" wire bullet head connector, stainless steel cover ring.


T0201300: 3/4" round, Red color marker light, 12VDC, PVC grommet with 8" wire open end

T0201301: 3/4" round, Red color marker light, 12VDC, PVC grommet with 8" wire bullet head connector, stainless steel cover ring.

T0201302: 3/4" round, Clear lens, Red color marker light, PVC grommet with 8" wire bullet head connector, stainless steel cover ring.

T0210002: High mount stainless steel ID Bar with three 3/4" high mount stop light.

T0210003: High mount three light connecting wire.

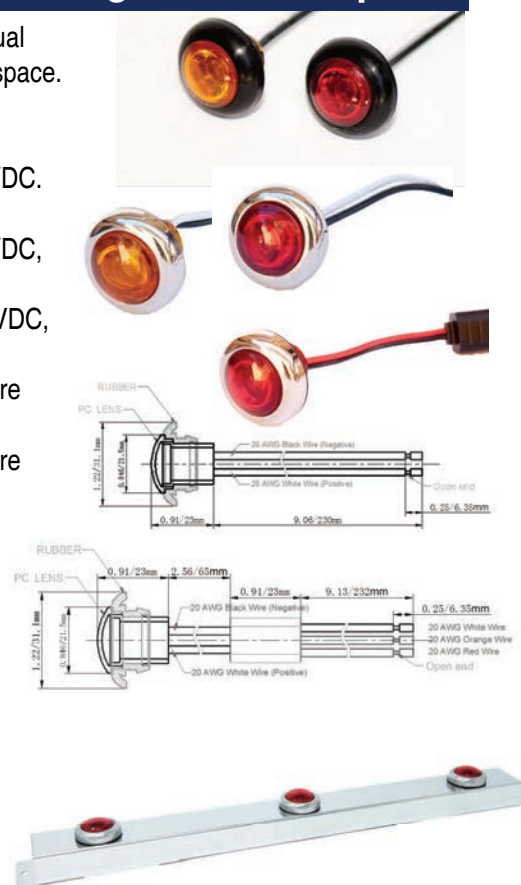

5" OVAL TRAILER INTERIOR LIGHT

Features a sealed, water-resistant PC lens, heavy-duty aluminum base. Designed for truck/trailer interior lighting, tool box lighting.

Operating Voltage: 12V –24 V DC.

8" open end hard wire.


Infrared automatic switch on/off.

Order Number:

T1205500: 5" oval, vehicle switch on/off control, 8" open end wire 12V-24V DC.

T1205510: 5" oval, infrared automatic switch on/off control, 8" open end wire 12V-24V DC.

T1205520: 5" oval, built-in switch on/off control, 8" open end wire 12V-24V DC.

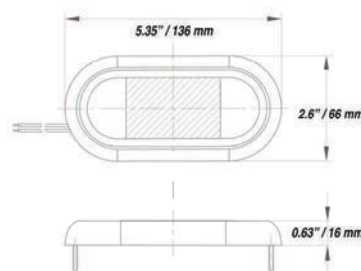

Accessory/Internal Area Light

Whit LED Strip, Self-Adhesive or easy –screw mounting and trim, can be used as Individual Bar(s) or a full strip. water approved, Designed. Accessory tool drawer lighting and Internal Area lighting, 60 lumen, 50mA/bar, 6500K, 12VDC

Order Number

T0310110:

Amber color LED strip bar, 12V DC, 20 Bar/full strip. 2.5" / each bar, 120" total length for 20 bars strip.



T0310210:

Blue color LED strip bar, 12V DC, 20 Bar/full strip. 2.5" / each bar, 120" total length for 20 bar strip.



T0310310:

Red color LED strip bar, 12V DC, 20 Bar/full strip. 2.5" / each bar, 120" total length for 20 bar strip.

T0310410:

Green color LED strip bar, 12V DC, 20 Bar/full strip. 2.5" / each bar, 120" total length for 20 bar strip.



T0310510:

White LED strip bar, 12V DC, 20 Bar/full strip. 2.5" / each bar, 120" total length for 20 bars strip.




LED License Plate Light

LED License Plate Light With Heavy-Duty Steel Housing, Water Resistant, 12VDC

Order Number

T0404500: White LED, heavy-duty steel housing, 12VDC.

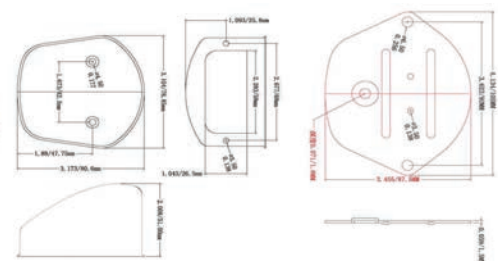

Order Number

T0601500: White LED , heavy-duty steel housing, 12V DC



Accessories

2" & 2 1/2" Round Heavy-Duty Flush Mount PVC Grommet

Order Number

T0310011: 2 1/2" Round, ø2.91" Mounting Grommet

T0310013: 2" Round, ø2.46" Mounting Grommet



4" Round Heavy-Duty PVC Grommet



Order Number

T1910011: 4" Round PVC Grommet

4" Round Stainless Steel Flange Ring & Anti-Theft Snap-in Ring

Order Number

T1910050: 4" Round Stainless Steel Ring



Order Number

T1910053: 4" Round Stainless Steel Snap-in Ring



6" Oval Heavy-Duty PVC Grommet

Order Number

T1910013: 6" Oval PVC Grommet



6" Oval Anti-Theft Stainless Steel Flange Ring



Order Number

T1910060: 6" Oval Stainless Steel Ring

Accessories

AWC-Weatherproof Harness

Order Number
T1910040



Weatherproof Flashing Delay Harness



Order Number
T1910042 PL3 with Weather RAK
T1910044 PL3 with Standard 3 PIN

WPC-Weatherproof Connector With Three 8" Wire 1/4" Open End

Order Number
T1910020



Order Number
T1910030



Order Number
T2410004



Order Number
T0310000



Power Source Tester with Multi-Connector for Truck LED Lights, 8 AA Batteries Included

Order Number
T0020005



6" LED Accessory and License Plate Frame Mounting Light

Order Number
T0801500



PROSTAR™ STOP/TURN TAILLIGHTS



4" Round Heavy-Duty Truck STT Light

Features a sealed, water-resistant PC lens. Meets latest FMVSS 108, DOT and SAE standards. Operating Voltage: 12V DC.

Order Number:

R0704100: 4" round, amber LED, turn signal light head only, 12V DC. PL3 connector harness & grommet are not included.

R0704110: 4" round, amber LED, clear lens turn signal light head, 12V DC. PL3 connector harness & grommet are not included.

R0704300: 4" round, red LED, STT signal light head, 12VDC. PL3 connector harness & grommet are not included.

R0704310: 4" round, red LED, clear lens stop/turn signal light head, 12VDC. PL3 connector harness & grommet are not included.

R4004500: 4" round, white LED, backup signal light head, 12VDC. PL3 connector harness & grommet are not included.



6" Oval Heavy-Duty Truck STT Light

Features a sealed, water-resistant PC lens. Meets latest FMVSS 108, DOT and SAE standards. Operating Voltage: 12V DC.

Order Number:

R1006100: 6" oval, amber LED, turn signal light, PL3 connector, 12V DC. PL3 connector harness & grommet are not included.

R1006110: 6" oval, amber LED, clear lens turn signal light, PL3 connector, 12V DC. PL3 connector harness & grommet are not included.

R1006300: 6" oval, red LED, stop/turn signal light, PL3 connector, 12V DC. PL3 connector harness & grommet are not included.

R1006310: 6" oval, red LED, clear lens stop/turn signal light, PL3 connector, 12V DC. PL3 connector harness & grommet are not included.

R3606500: 6" oval, white LED, backup light, PL3 connector, 12V DC. PL3 connector harness & grommet are not included.



3X5" Rectangular Heavy-Duty Truck STT Light

Features a sealed, water-resistant PC lens. Meets latest FMVSS 108, DOT and SAE standards. Operating Voltage: 12V DC.

Order Number:

R1205100: 3X5" rectangular, amber LED, turn signal light, PL3 connector, 12V DC. PL3 connector harness & grommet are not included.

R1205110: 3X5" rectangular, amber LED, clear lens turn signal light, PL3 connector, 12V DC. PL3 connector harness & grommet are not included.

R1205300: 3X5" rectangular, red LED, stop/turn signal light, PL3 connector, 12V DC. PL3 connector harness & grommet are not included.

R1205310: 3X5" rectangular, red LED, clear lens stop/turn signal light, PL3 connector, 12V DC. PL3 connector harness & grommet are not included.

R1205500: 3X5" rectangular, white LED, backup light, PL3 connector, 12V DC. PL3 connector harness & grommet are not included.

R1205510: 3X5" rectangular, full clear lens white LED, backup light, PL3 connector, 12V DC. PL3 connector harness & grommet are not included.




6" Rectangular Heavy-Duty Truck Marker & Center High Mount STT Light

Features a sealed, water-resistant PC lens. Meets latest FMVSS 108, DOT and SAE standards. Operating Voltage: 12V DC. 8" open end hard wire.

Order Number:

R0406100: 6" rectangular, amber LED, marker & STT signal light, 12V DC.

R0406300: 6" rectangular, red LED, marker & STT signal light, 12V DC.



16" Slim Line Heavy-Duty Truck STT Light

Features a sealed, water-resistant slim bar, PC with reflective lens. Meets latest FMVSS 108, DOT and SAE standards. Operating Voltage: 12V DC. 8" open end hard wire.



Order Number:

R1116300: 16" slim line, red LED, STT signal light, 12V DC.

R1116301: 16" slim line, red LED, STT signal light, 12V DC, w/ chrome bezel .

R1116310: 16" slim line, red LED, STT signal light, 12V DC.

R1116311: 16" slim line, red LED, clear lens STT signal light, 12V DC, w/chrome bezel .

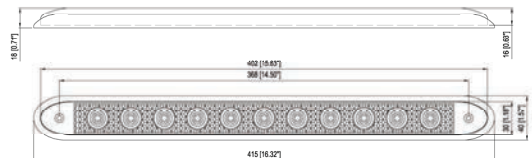

1.5" Round Marker Light

Features a sealed, water-resistant PC lens. Meets latest FMVSS 108, DOT and SAE standards. Operating Voltage: PC P2 12V DC. 8" wire with Bullet connector.


Order Number:

R0615100: 1.5" RND, amber LED, marker light, 12V DC.

R0615110: 1.5" RND, amber LED, clear lens STT signal light, 12V DC.

R0615300: 1.5" RND, red LED, STT signal light, 12V DC.

R0615300: 1.5" RND, red LED, clear lens STT signal light, 12V DC.



PROSTAR™ 4" round heavy-duty truck signal light

Features a sealed, water-resistant PC lens. Meets latest FMVSS 108, DOT and SAE standards. Operating Voltage: 12V DC.

Order Number:

R0604100: 4" round, Amber LED, turn signal light, PL3 connector, 12V DC.

R0604300: Discontinue item, all inventory sold.

R4004500: 4" round, White LED, Backup Signal light, PL3 connector, 12V DC.



PROSTAR™ 6" oval heavy-duty truck signal light

Features a sealed, water-resistant PC lens. Meets latest FMVSS 108, DOT and SAE standards. Operating Voltage: 12V DC.

Order Number:

R1306100: 6" oval, amber LED, turn signal light, PL3 connector, 12V DC.

R1306300: 6" oval, red LED, STT signal light, PL3 connector, 12V DC.



PROSTAR™ 6" oval heavy-duty truck signal light

Features a sealed, water-resistant PC lens. Meets latest FMVSS 108, DOT and SAE standards. Operating Voltage: 12V DC.

Order Number:

R0606100: 6" oval, amber LED, turn signal light, PL3 connector, 12V DC.

R0606300: 6" oval, red LED, STT signal light, PL3 connector, 12V DC.



PROSTAR™ 6" super slim surface mounting truck signal light

Features a sealed, water-resistant, PC lens. Meets latest FMVSS 108, DOT and SAE standards. Operating Voltage: 12V DC.

Order Number:

R1006120: amber LED, surface mount turn signal light with chrome plate bezel. 12V DC.

R1006320: red LED, surface mount stop/turn signal light with chrome plate bezel. 12V DC.



PROSTAR™ double face heavy-duty truck signal light

Features a sealed, water-resistant, PC lens. Meets latest FMVSS 108, DOT and SAE standards. Operating Voltage: 12V DC.

Order Number:

R8004610: Amber/Red double face turning, marker signal light, left side, hard-wired, 12V DC.

R8004620: Amber/Red double face turning, marker signal light, right side, hard-wired, 12V DC.



PROSTAR™ 3/4" mini LED clearance/marker light

Features a sealed, water-resistant, PC lens. Meets latest FMVSS 108, DOT and SAE standards. P2, PC rated. Operating Voltage: 12V DC.

Order Number:

R0101100: Amber LED, clearance/marker light hard-wired, 12V DC.

R0101300: Red LED, clearance/marker light hard-wired, 12V DC.



PROSTAR™ LED license plate & accessory light

Features a sealed, water-resistant, PC lens. Chrome housing, Meets latest FMVSS 108, DOT and SAE standards. Operating Voltage: 12V DC.

Order Number:

R0304500: white LED License plate light, hard-wired, 12V DC.



PROSTAR™ 15" heavy-duty truck signal light

Features a sealed, water-resistant, PC lens. Meets latest FMVSS 108, DOT and SAE standards. Operating Voltage: 12V DC.

Order Number:

R1108300: 15" red LED, STT signal light, high mount stop signal light, hard-wired, 12V DC.



PROSTAR™ 6.5" LED strip-type clearance/marker light

Features a sealed, water-resistant, PC lens. Meets latest FMVSS 108, DOT and SAE standards. P2, PC rated. Operating Voltage: 12V DC.

Order Number:

R0906100: 6.5" amber LED marker light, hard-wired, snap-in chrome ring, 12V DC.

R0906300: 6.5" red LED marker light, hard-wired, snap-in chrome ring, 12V DC.



PROSTAR™ 2" round super slim clearance/marker light

Features a sealed, water-resistant, PC lens. Meets latest FMVSS 108, DOT and SAE standards. P2, PC rated. Operating Voltage: 12V DC.

Order Number:

R0702100: Super slim, surface mounting snap in chrome bezel, amber LED, 2" round marker light, hard-wired, 12V DC.

R0702300: Super slim, surface mounting snap in chrome bezel, red LED, 2" round marker light, hard-wired, 12V DC.



PROSTAR™ 2.5" round super slim clearance/marker light

Features a sealed, water-resistant, PC lens. Meets latest FMVSS 108, DOT and SAE standards. P2, PC rated. Operating Voltage: 12V DC.

Order Number:

R0902100: Super slim, surface mounting snap in chrome bezel, amber LED, 2.5" round marker light, hard-wired, 12V DC.

R0902300: Super slim, surface mounting snap in chrome bezel, red LED, 2.5" round marker light, hard-wired, 12V DC.



PROSTAR™ CAB mount marker light

Features a sealed, water-resistant, PC lens. Meets latest FMVSS 108, DOT and SAE standards. P2, PC rated. Operating Voltage: 12V DC.

Order Number:

R1703100: amber LED, CAB mount marker light, chrome housing hard-wired, 12V DC.



School Bus & DOT Emergency Warning Light



Emergency Warning LED Mini Bar

Low profile design LED light functions as EMERGENCY WARNING light for DOT work trucks, utility work trucks and other emergency vehicles. Class 1 light output for primary emergency warning light use.

Specifications:

PC Housing, Water resistant, internal built-in 8 flash patterns controller, 9' cable wire with cig-plug. ON/OFF & pattern change switch, Class 1 light output. Magnetic mounting to any metal surface and stainless steel permanent mounting bar included.

Operating Voltage: 12V – 24V DC

Operating temperature -40C° - 85C°

Order Part Number:

F2410100: Amber color LED, clear housing, 8 flash patterns. 12V-24VDC.

F2410140: Amber/Green color LED, clear housing, 8 flash patterns. 12V-24VDC.

F2410150: Amber/White color LED, clear housing, 8 flash patterns. 12V-24VDC.

F2410200: Blue color LED, clear housing, 8 flash patterns. 12V-24VDC.

F2410230: Red/Blue color LED, clear housing, 8 flash patterns. 12V-24VDC.

F2410300: Red color LED, clear housing, 8 flash patterns. 12V-24VDC.

F2410400: Green color LED, clear housing, 8 flash patterns. 12V-24VDC.

F2410450: Green/White color LED, clear housing, 8 flash patterns. 12V-24VDC.


F2410500: White color LED, clear housing, 8 flash patterns. 12V-24VDC.

F2410001: Stainless steel permanent mounting bracket.

F2410002: MINI BAR Magnetic mounting kit.

F2410005: MINI BAR weather approval re-closeable fastener mounting kit for non-iron metal surface.

F2410010: MINI BAR Amber color dome.

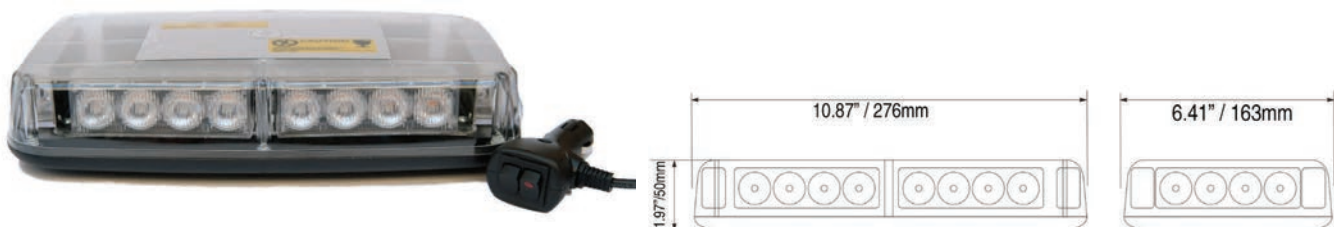

Emergency Warning LED Bullet Bar

Low profile design LED light functions as EMERGENCY WARNING light for DOT work trucks, utility work trucks and other emergency vehicles. Class 1 light output for primary emergency warning light use.

Specifications:

PC Housing, Water resistant, internal built in 8 flash patterns controller, 9' cable wire with cig-plug ON/OFF & pattern change switch, Class 1 light output. Magnetic mounting to any metal surface & permanent mounting option.

Operating Voltage: 12V –24V DC, Operating Currents: 5A, (60W, tested at 12VDC.)

Order Part Number:

F3016100: Amber color LED, clear dome, 8 flash patterns. Magnet mounting, (Stainless steel permanent mounting bar replacement kit included).

F3016500: White color LED, clear dome, 8 flash patterns. Magnet mounting, (Stainless steel permanent mounting bar replacement kit included).

F3016150: Amber/White color LED, clear dome, 8 flash patterns. Magnet mounting, (Stainless steel permanent mounting bar replacement kit included).


F3016200: Blue color LED, clear dome, 8 flash patterns. Magnet mounting, (Stainless steel permanent mounting bar replacement kit included).

F3016300: Red color LED, clear dome, 8 flash patterns. Magnet mounting, (Stainless steel permanent mounting bar replacement kit included).

F3016230: Red/Blue color LED, clear dome, 8 flash patterns. Magnet mounting, (Stainless steel permanent mounting bar replacement kit included).

F3016010: Amber color replacement dome.

F3016005: Bullet bar weather approved hole-less re-closable fastener mounting pad.
(Aluminum mounting surface or any other material surface mounting without drilling a hole)

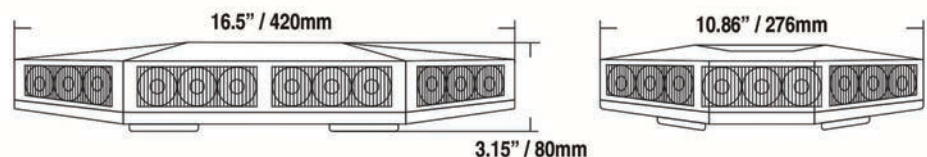

Emergency Warning LED 21 Inch Slim Bar

Low profile design LED light function as EMERGENCY WARNING light for DOT work trucks, utility work trucks and other emergency vehicles. Class 1 light output for primary emergency warning light use.

Specification:

PC Housing, Water resistant, internal built in 26 flash patterns controller, 9' cable wire with cig-plug ON/OFF & pattern change switch, Class 1 light output. Permanent mounting bracket included. Optional magnetic mounting kit and weather approval re-closable fastener mounting kit available and sale separate.

Order Part Number:

F7221100: Amber color LED, clear dome, 26 flashing patterns. Permanent mounting bracket built-in.

F7221150: Amber/White color LED, clear dome, 26 flashing patterns. Permanent mounting bracket built-in.

F7221200: Blue color LED, clear dome, 26 flashing patterns. Permanent mounting bracket built-in.

F7221230: Red/Blue color LED, clear dome, 26 flashing patterns. Permanent mounting bracket built-in.

F7221300: Red color LED, clear dome, 26 flashing patterns. Permanent mounting bracket built-in.

F7221350: Red/White color LED, clear dome, 26 flashing patterns. Permanent mounting bracket built-in.

F7221400: Green color LED, clear dome, 26 flashing patterns. Permanent mounting bracket built-in.


F7221140: Amber/Green color LED, clear dome, 26 flashing patterns. Permanent mounting bracket built-in.

F7221450: Green/White color LED, clear dome, 26 flashing patterns. Permanent mounting bracket built-in.

F7221500: White color LED, clear dome, 26 flashing patterns. Permanent mounting bracket built-in.

F7221001: Magnetic Mounting Kit.

F7221002: Slim bar 3M weather approval re-closable fastener mounting kit.

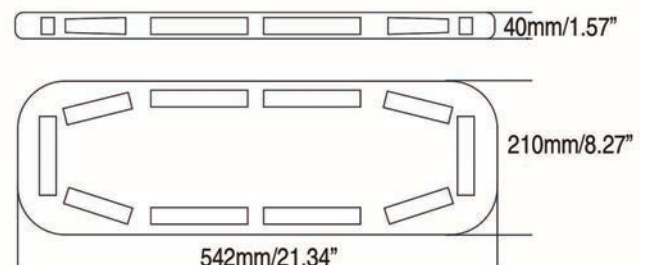

****Listed maximum lumen output is based on individual LED lab test results. Actual lumen output may vary.**

Super Slim LED Emergency Warning Light

2nd generation completed redesign for water approval, super slim surface mounting LED warning light functions as EMERGENCY WARNING light for DOT work trucks, utility work trucks, and other emergency vehicles. SAE & DOT Class 1 light output for primary emergency warning use.

Specifications:

PC Lens sealed with aluminum base housing, water resistant, built-in self-contained 26 flash patterns, simultaneously functions with multiple light heads.

Operating Voltage: 12V –24V DC

Operating temperature-40C°- 85C°

Order Part Number:

F0604100: 4.4" super slim Amber LED warning light, surface mounting, 26 flash patterns, 12V-24VDC.

F0604120: 4.4" super slim Amber/Blue LED warning light, surface mounting, 26 flash patterns, 12V-24VDC.

F0604130: 4.4" super slim Amber/Red LED warning light, surface mounting, 26 flash patterns, 12V-24VDC.

F0604140: 4.4" super slim Amber/Green LED warning light, surface mounting, 26 flash patterns, 12V-24VDC.

F0604150: 4.4" super slim Amber/White LED warning light, surface mounting, 26 flash patterns, 12V-24VDC.

F0604200: 4.4" super slim Blue LED warning light, surface mounting, 26 flash patterns, 12V-24VDC.

F0604230: 4.4" super slim Blue/Red LED warning light, surface mounting, 26 flash patterns, 12V-24VDC.


F0604300: 4.4" super slim Red LED warning light, surface mounting, 26 flash patterns, 12V-24VDC.

F0604350: 4.4" super slim Red/White LED warning light, surface mounting, 26 flash patterns, 12V-24VDC.

F0604400: 4.4" super slim Green LED warning light, surface mounting, 26 flash patterns, 12V-24VDC.

F0604450: 4.4" super slim Green/White LED warning light, surface mounting, 26 flash patterns, 12V-24VDC.

F0604500: 4.4" super slim White LED warning light, surface mounting, 26 flash patterns, 12V-24VDC.

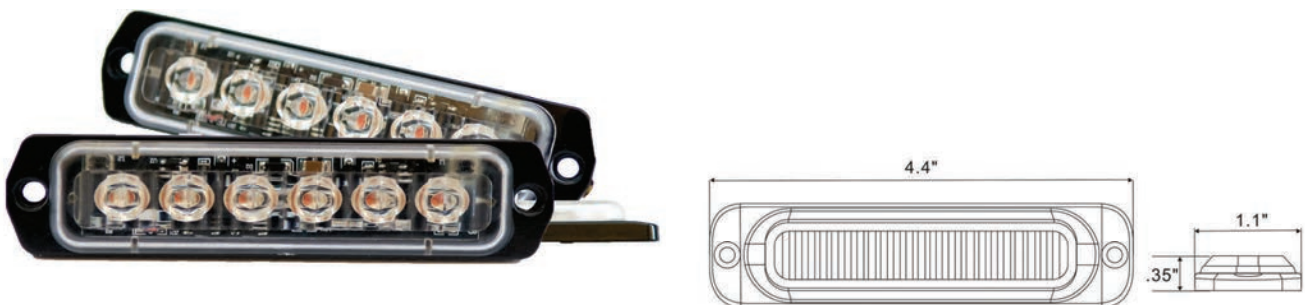

6 Inch Slim Oval Grommet Mounting LED Emergency Warning Light

New generation completed redesign for water-resistant, slim shape, grommet (package included) or stainless flange (not included in package, purchase separately) mounting LED warning light, functions as EMERGENCY WARNING light for DOT work trucks, utility work trucks, and other emergency vehicles. SAE & DOT Class 1 complied for primary emergency warning use.

Specifications:

Sealed PC Lens and base housing, Water resistant, built-in switch to select self-contained 27 flash patterns, simultaneous function with multiple (up to 6) light heads.

Order Part Number:

F1606100: 6" oval Amber LED warning light, clear lens, 27 flash patterns, mounting grommet & harness 12V-24VDC.

F1606120: 6" oval Amber/Blue LED warning light, clear lens, 27 flash patterns, mounting grommet & harness 12V-24VDC.

F1606130: 6" oval Amber/Red LED warning light, clear lens, 27 flash patterns, mounting grommet & harness 12V-24VDC.

F1606140: 6" oval Amber/Green LED warning light, clear lens, 27 flash patterns, mounting grommet & harness 12V-24VDC.

F1606150: 6" oval Amber/White LED warning light, clear lens, 27 flash patterns, mounting grommet & harness 12V-24VDC.

F1606200: 6" oval Blue LED warning light, clear lens, 27 flash patterns, mounting grommet & harness 12V-24VDC.

F1606230: 6" oval Blue/Red LED warning light, clear lens, 27 flash patterns, mounting grommet & harness 12V-24VDC.

F1606300: 6" oval Red LED warning light, clear lens, 27 flash patterns, mounting grommet & harness 12V-24VDC.


F1606350: 6" oval Red/White LED warning light, clear lens, 27 flash patterns, mounting grommet & harness 12V-24VDC.

F1606400: 6" oval Green LED warning light, clear lens, 27 flash patterns, mounting grommet & harness 12V-24VDC.

F1606450: 6" oval Green/white LED warning light, clear lens, 27 flash patterns, mounting grommet & harness 12V-24VDC.

F1606500: 6" oval White LED warning light, clear lens, 27 flash patterns, mounting grommet & harness 12V-24VDC.

T1910060: 6" oval flange mounting ring with stainless steel cover.

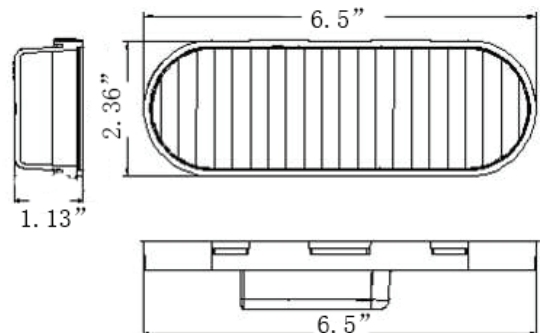

DUAL COLOR WARNING LIGHT

Dual color surface mount LED warning light functions as EMERGENCY WARNING light for DOT work trucks, utility work trucks and other emergency vehicles. SAE & DOT Class 1 and ECE R65 & R10 light output for primary emergency warning use.

Specifications:

PC Lens sealed, aluminum base with side anti-collision bar, water resistant, built-in self-contained 21 flash patterns, 12" open-end wire, simultaneously functions with multiple light heads.

Operating voltage: 12V –24V DC

Order Part Number:

F2405120: 5" dual color Amber/Blue LED warning light, surface mounting, 23 flash patterns.


F2405130: 5" dual color Amber/Red LED warning light, surface mounting, 23 flash patterns.

F2405140: 5" dual color Amber/Green LED warning light, surface mounting, 23 flash patterns.

F2405150: 5" dual color Amber/White LED warning light, surface mounting, 23 flash patterns.

F2405230: 5" dual color Blue/Red LED warning light, surface mounting, 23 flash patterns.

F2405350: 5" dual color Red/White LED warning light, surface mounting, 23 flash patterns.

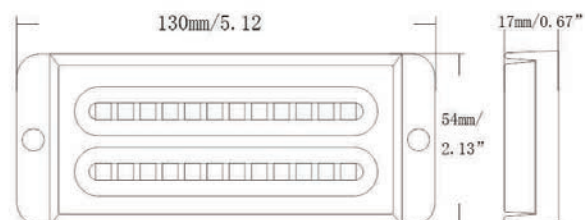

4" Round and 6" Oval Emergency Warning Light

4" Round LED light that functions as an EMERGENCY WARNING light for DOT work trucks, emergency vehicles. U.S. independent laboratory tested meets or exceeds latest DOT FMVSS 108 and SAE standards, SAE J595, J1318 class 1 approved for primary emergency warning light use.

Specifications

Features a sealed, water-resistant, polycarbonate optical lens and housing. Internal built-in 5X flashing pattern, alternating flashing controller.

(operate with 1X CA title 13, 4X flashing pattern, freedom, alternating and simultaneous flashing controller are available as an option for OEM large quantity purchase)

Operating Voltage: 12V-24V DC (8-32V)

Operating Current: <2.0 A (tested at 12.8V)

Order Number:

F1912101: 12V-24V DC, Amber LED, 5X Flash Pattern, Alternating Flash Controller, PVC Grommet. Weather-Pak Connector Harness

F1912201: 12V-24V DC, Blue LED, 5X Flash Pattern, Alternating Flash Controller, PVC Grommet. Weather-Pak Connector Harness

F1912301: 12V-24V DC, Red LED, 5X Flash Pattern, Alternating Flash Controller, PVC Grommet. Weather-Pak Connector Harness

F1912501: 12V-24V DC, White LED, 5X Flash Pattern, Alternating Flash Controller, PVC Grommet. Weather-Pak Connector Harness



Order Number:

F1914101: 12V-24V DC, Amber LED, 5X Flashing Pattern, Alternating Flash Controller, PVC Grommet. Weather-Pak Connector Harness

F1914201: 12V-24V DC, Blue LED, 5X Flashing Pattern, Alternating Flash Controller, PVC Grommet. Weather-Pak Connector Harness

F1914301: 12V-24V DC, Red LED, 5X Flashing Pattern, Alternating Flash Controller, PVC Grommet. Weather-Pak Connector Harness

F1914501: 12V-24V DC, White LED, 5X Flashing Pattern, Alternating Flash Controller, PVC Grommet. Weather-Pak Connector Harness



5" Round / PAR46 Emergency Warning Light


5" Round LED light that functions as an EMERGENCY WARNING light for DOT work trucks, emergency vehicles. U.S. independent laboratory tested meets or exceeds latest DOT FMVSS 108 and SAE standards, SAE J595, CA title 13 approved for primary emergency warning light use.

Specifications

Features a sealed, water-resistant, polycarbonate optical lens and housing. Internal built-in 1X CA title 13 flash pattern, alternating flash controller. Light head fits in regular PAR46 housing.

Operating Voltage: 12V-24V DC (8-32V)

Operating Current: <2.5 A (tested at 12.8V)




Order Number:

F3502140: 12V-24V DC, Amber LED, 1X CA Title 13 Flash Pattern, Weather-Pak Connector Harness

F3502141: 12V-24V DC, Amber LED, 1X CA Title 13 Flash Pattern, PVC Grommet. Weather-Pak Connector Harness

F3502142: 12V-24V DC, Amber LED, 1X CA Title 13 Flash Pattern, Rubber Tractor Bowl. Weather-Pak Connector Harness

F3510001: PVC Grommet



7" Round LED, BUS STT, Back-Up Signal Light

7" Round, LED light functions as a STOP, TURN, and TAIL light for school buses, heavy-duty construction trucks, and trailers. Independent laboratory tested, meets or exceeds latest DOT FMVSS 108 and SAE standards. The design is in accordance with the **Department of California Highway Patrol**, California Vehicle Code (VC) Section 24003 and Section 24607 as noted in an information bulletin published on November 18, 2002.

Specifications

Features a sealed, water-resistant, polycarbonate optical lens and housing.

Operating Voltage: 12V DC (8-16V), or 12V-24V DC (8-32V)

Operating Current: <0.60 A (test at 12.8V)

Order Number:

T5501100: 12V DC, Amber Turn Light

T5501120: 12V-24V DC, Amber Turn Light

T5501300: 12VDC, Red STT Light

T5501320: 12V-24V DC, Red STT Light

T5501520: 12V-24V DC, White Back-up light



7" School Bus Emergency Warning Light

7" Round LED light that functions as an EMERGENCY WARNING light for school buses. U.S. independent laboratory tested meets or exceeds latest DOT FMVSS 108 and SAE standards, SAE J887 approved for School Bus Emergency Warning Light use.

Specifications

Features a sealed, water-resistant, polycarbonate optical lens and housing. Internal built - in single standard flashing and strobe flash pattern, operates with freedom, alternating and simultaneous flash controller.


Operating Voltage: 12V-24V DC (8-32V)

Operating Current: <2.0 A (tested at 12.8V)

Order Number:

F5502120: 12V-24V DC, Amber LED, School Bus Warning Light.

F5502320: 12V-24V DC, Red LED, School Bus Warning Light.

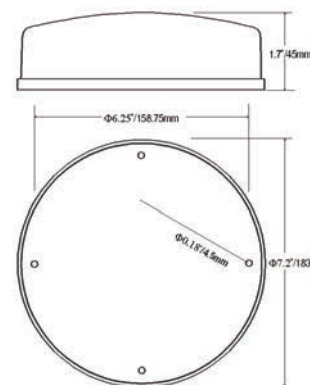


Tri-Angle Bus Marker Light

Features a sealed, water-resistant, polycarbonate optical lens and housing.

Order Number

T0401100: Amber LED, Bus Marker Light

T0401300: Red LED, Bus Marker Light

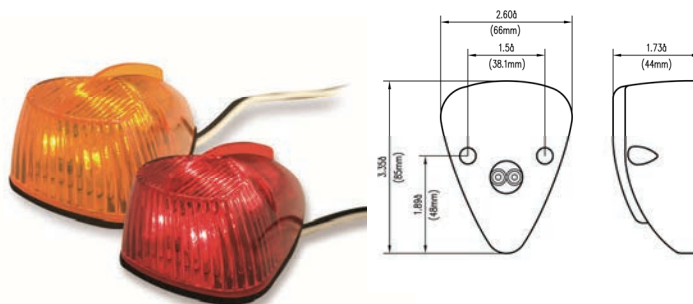

Limited Lifetime Warranty

ALT Enterprises warrants each new product to be free from defects in material and workmanship, under normal use and service, for a lifetime period from the date of delivery throughout the lifetime of use by the original user/purchaser (customer), except for noted products. **(Five years warranty for ELITEOPTO™ emergency warning signal light and WELLSTAR™ work light)** Each lighting product Limited Warranty as applicable is not transferable and applies to the original installation of the ALT Enterprises product. To be eligible for lighting products Limited Warranty, ALT Enterprises products must remain intact, free from physical abuse, and not subject to improper installation or inadequate maintenance, nor to units that have problems relating to service or modification at any facility other than the ALT Enterprises factory or authorized warranty service center. Lighting products Limited Lifetime Warranty applies only to LED light sources. All other components (lens, light housing, connector, and assembly kit) are limited to a three year warranty. The lighting products Limited Warranty does not apply to several applications such as construction equipment and off-road vehicles. These are some examples of excluded applications, unless expressly agreed to in writing by ALT Enterprises.

ALT Enterprises does not warranty its products as to their fitness for any special use or function. **MANY CHEMICALS AND/OR CLEANERS ARE INCOMPATIBLE** with ALT Enterprises sealed LED lighting products. The lighting products Limited Warranty does not apply to damage associated with incompatible chemicals or cleaners. ALT Enterprises' sealed products are to **REMAIN INTACT, FREE FROM PHYSICAL ABUSE AND MUST BE USED ONLY WITH ALT ENTERPRISES APPROVED WIRING ACCESSORIES.** **ANY VIOLATION OF THESE CONDITIONS WILL VOID THE** all cars lighting products Limited Warranty. Our laboratory may inspect products submitted for lighting products Limited Warranty consideration. During this warranty period, the obligation of ALT Enterprises is limited to repairing or replacing, as ALT Enterprises may select. ALT Enterprises will provide warranty for any unit that is delivered, transported prepaid to ALT Enterprises, or designated authorized warranty service center for examination. If such examination reveals a defect in material and/or workmanship, a replacement will be issued. This warranty does not cover travel expenses, the cost of specialized equipment for gaining access to the product, or labor charges for removal and re-installation of the product. There are no warranties, expressed or implied (including any warranty of merchantability or fitness), which extend beyond the lighting products Warranty. Any inconveniences such as the loss of use of the product, loss of time, commercial loss, incidental or consequential damages are not to be covered under warranty. ALT Enterprises reserves the right to change the design of the product without assuming any obligation to modify any product previously manufactured or to replace warranted product other than with redesigned product. We believe our products should provide good service under proper operation conditions, and this will be reflected in our consideration of items returned for examination.

To purchase please contact:



ALT Enterprises, 28296 Constellation Road, Valencia, California 91355 U.S.A. Email: sales@alt-ent.com

Tel: (661) 295-6818 Toll Free: (844) 406-6818 Fax: (661) 295-6816 Toll Free: (844) 881-6816