

ELITEOPTO™ LED Traffic Command

Aluminum Housing IP67 Water Resistant
Internal built in 15 flash patterns display controller
Auxiliary Control Sync With Other Warning Lights
Operating Temperature -40°F/-40°C- 176°F/85°C°



28296 Constellation Rd, Valencia, CA91355
Tell: (661)295-6818 Toll free:(844)406-6818
Fax: (661)295-6816 Toll free:(844)881-6816 & (888)774-9793
Email: sales@alt-ent.com www.alt-ent.com



Traffic Commander

LED traffic command function as traffic adviser signal light for DOT work trucks, utility work trucks and other emergency vehicles. Class 1 light output for primary emergency warning light use.

Specification:

Aluminum Housing, IP67 Water resistant, internal built in 15 flash patterns controller, 16.4'/5M cable wire with display controller, Class 1 light output. Permanent mounting bracket included. Dual side mounting version available for sale.


Operating Voltage: 12V –24V DC, Reverse Polarity Protection, Auxiliary Control With Other Warning Light System. Operating Temperature–40°F/-40C°- 176°F/85C°.

Order Part Number:

F6448100: 47 inch, Amber color LED, PC clear lens with aluminum housing, 15 flashing patterns, permanent mounting bracket. Display controller with 9' cable wire.

F6448120: Dual side mounting version.

F6448001: 16.4'/5M extension control cable wire

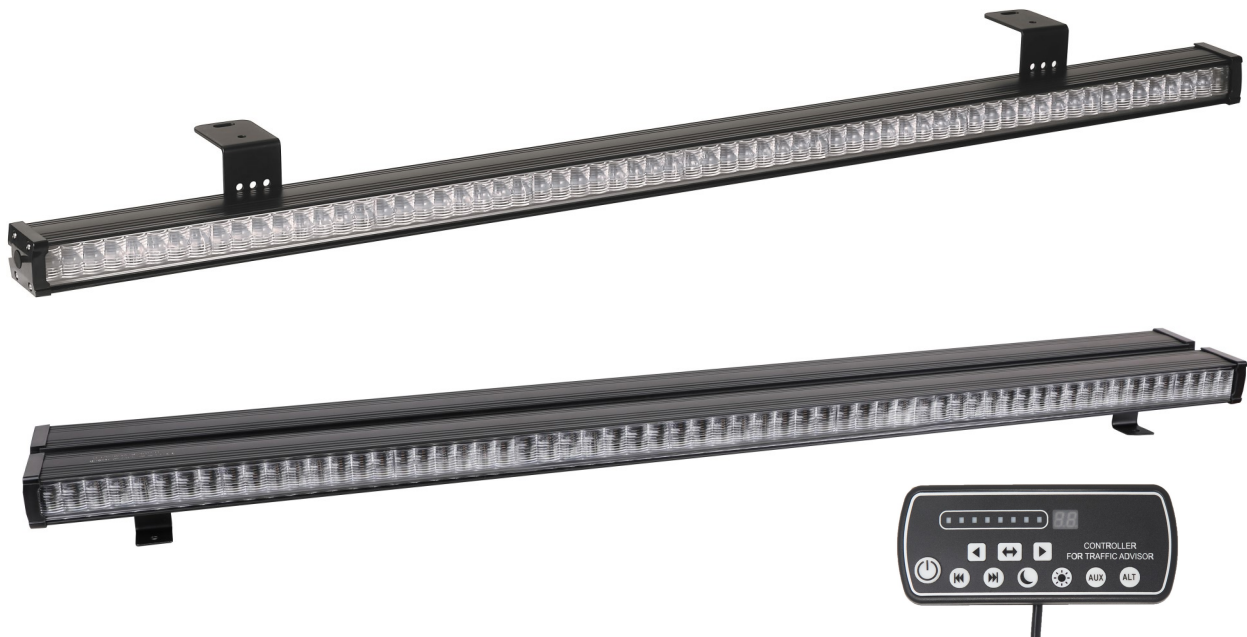

Size:

