



# ELECTRIC SCISSOR LIFT

**AS0607E / AS0607WE  
(AS1930E / AS1932E)**

## HIGHLIGHTS

LGMG E Series scissor lifts provide longer battery duty cycle life with a direct electric drive system. This series can be used on a variety of construction sites, maintenance job sites and other applications, both indoor and outdoor. The wide product line from 3.6m to 13.8m platform height are perfect for different working height requirements.


- Battery powered, zero emission and quiet drive mean this machine is environmentally friendly.
- Efficient electric drive system provides longer-lasting performance and better gradeability.
- Proportional lift and drive controls deliver smoother operation.
- Swing out component trays for easy access and maintenance.
- Intelligent self-diagnostic system for quick troubleshooting.
- Commonality in parts with other electric scissor lifts.



# LGMG Electric Motor Drive Scissor Lift

## SPECIFICATIONS

MODELS	AS0607E (AS1930E)		AS0607WE (AS1932E)	
Measurements	Metric	US	Metric	US
Working Height Max.	7.8m	25.6ft	7.8m	25.6ft
<b>A</b> Platform Height-Raised	5.8m	19ft	5.8m	19ft
<b>B</b> Platform Height-Stowed	1.02m	3.3ft	1.02m	3.3ft
<b>C</b> Platform Length	1.63m	5.3ft	1.63m	5.3ft
<b>D</b> Platform Width	0.74m	2.4ft	0.74m	2.4ft
<b>E</b> Overall Length(with ladder)	1.86m	6.1ft	1.86m	6.1ft
<b>F</b> Overall Width	0.76m	2.5ft	0.81m	2.7ft
<b>G</b> Overall Height-Rails Up	2.14m	7ft	2.14m	7ft
Overall Height-Rails Down	1.84m	6ft	1.84m	6ft
<b>H</b> Extension Deck	0.9m	3ft	0.9m	3ft
<b>I</b> Wheelbase	1.35m	53in	1.35m	53in
Ground Clearance(Stowed/Raised)	80/20mm	3.15/0.79in	80/20mm	3.15/0.79in
PRODUCTIVITY				
Platform Occupants Max. (in/out)	2/0	2/0	2/1	2/1
Platform Capacity	230 kg	510 lbs	230 kg	510 lbs
Platform Capacity-Extension	120 kg	265 lbs	120 kg	265 lbs
Drive Height	Full Height			
Gradeability-Stowed	25 %			
Turning Radius-Inside	0			
Turning Radius-Outside	1.72m	5.6ft	1.75m	5.6ft
Raise/Lower Speed	16/28 s	16/28 s	16/28 s	16/28 s
Brakes	Front-wheel Brake			
Drive Mode	4×2			
Tires Type	Solid Non-marking			
Tires Size	323×100mm	12.7×4 in	323×100mm	12.7×4 in
POWER				
Power Source	24V DC 225Ah			
HYDRAULIC SYSTEM				
Hydraulic Oil Capacity	9.5L	2.1gal	9.5L	2.1gal
WEIGHT				
Machine Weight(CE/ANSI)	1610kg	3549 lbs	1620kg	3571 lbs

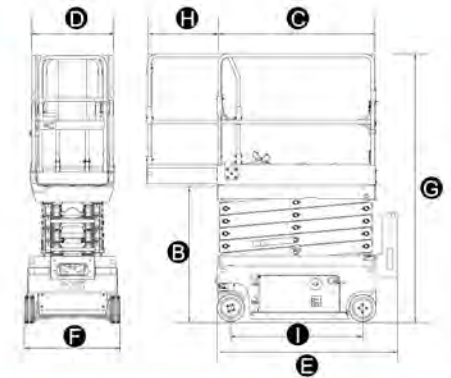

## STANDARD FEATURES

- Proportional control
- Foldable guardrail
- Emergency stop device
- Manual brake release
- Emergency descent
- Swing-out component tray
- Pothole guard
- Self-lock entry gate
- Tilt alarm with lift cut-out
- Overload sensing system
- Descent alarm with flashing beacon
- Horn/hour meter
- All motions alarm
- Full-height drive
- Intelligent diagnostic system

## OPTIONAL

- AC power to platform
- Platform anti-collision device
- Air tube to platform
- Maintenance-free battery
- Lithium battery
- GPS

### Machines in compliant with EN280 / ANSI 92.20 Standard.

Specifications subject to change without notice. Photos and diagrams in the page are for promotional purposes only.  
2020 V1 Version

### LINGONG GROUP JINAN HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China  
Email: sales@lmg.com.cn Tel:+86-0531-67879283

### LGMG Europe B.V.

Address: Laanweg 16 3208LC Spijkenisse Rotterdam, The Netherlands

### LGMG North America, Inc.

Address: 1445 Sheffler Dr, Chambersburg, PA, 17201, USA



RELIABILITY IN ACTION