

brunner ::

hallingdal 65 Group 6


kvadrat



573



563



660



694



687




674



590



547



526



657



680



600



596

Hallingdal 65



944




960



980



907




420




457



407

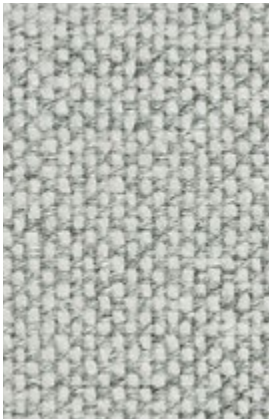


110



103




113



123



190



166



180



173



143

Hallingdal 65



100



200




227



224




220

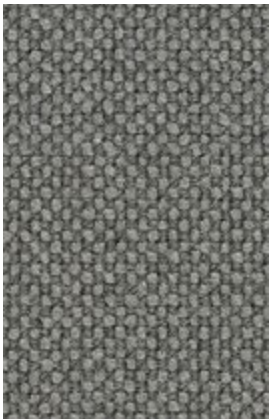

153



116

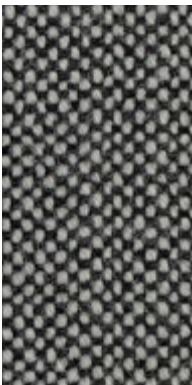


126



376



368



130



270




350



370




390




890



810



850



840




723



733



750



968



702



764



754



773



753



763

Hallingdal 65
Designed by Nanna Ditzte

UK

Application Offices, hotels, institutions, domestic use. Great durability.

Description 70% new wool, 30% viscose. Width 51 inches (130 cm). Weight app. 795 g/lin.m. Material dyed. Foreign fibre may occur in light colours. Colour differences may occur.

Selvedge ⬆

Abrasion: App. 100.000 rubs acc. to the Martindale method EN ISO 12947.

Lightfastness (ISO) 5-7. **Pilling** (EN ISO) 3.

Fastness to rubbing (ISO) dry 4-5, wet 3-5.

Flame resistance: EN 1021-1/2 ignition source

0-1. BS 5852, part 1. BS 5852 Crib 5. DIN 4102

B2. ÖNORM B1 / Q1. UNI 9175 1IM. NF D 60 013.

US Cal. Bull. 117-2013. AS/NZS 1530.3. IMO

A.652(16). (Copy of test report available).

Care Please see the ISO symbols.

GB



10^{year}
warranty

Quality and environmental system accreditation according to ISO 9001 and ISO 14001.

Encouraging the use of sustainable fibres. Durable and high quality. Hazardous substances restricted.

Contact and further information www.kvadrat.dk