

210 ABS CEMENT MEDIUM BODY/BLACK

General Description:

E-Z Weld ABS (Acrylonitrile-Butadiene-Styrene) is medium bodied, medium set ABS Solvent Cement. It is formulated for use on ABS pipe and fittings only. This cement has good gap filling properties for pipes and fittings up to 8" (200 mm) diameter. It provides consistently strong joint if used correctly.

Application:

This cement is good for joining ABS pipes & fittings of all schedules. It is approved for drain waste vent, sewer, conduit and foam core applications only. ABS pipes & fittings are generally soft and the use of primer is not recommended. Never add thinners or additive. Never use the cement if it is stringy, lumpy or jelly like. ABS is for non-potable water systems. Always follow instructions on the label.

Application temperature: 32°F to 110°F (0°C to 43°C).
Storage temperature: 45°F to 110°F (7°C to 43°C).

Certification:




This product is tested, certified and approved by NSF International for use on drain, waste and potable water systems. It is also listed by the International Association of Plumbing & Mechanical Officials (IAPMO). It carries the Uniform Plumbing Code (UPC) seal. This cement meets ASTM Standard D2235.

Quality Assurance:

Every batch of cement is carefully checked and monitored to assure consistently high quality standards. Records of every batch are kept. A sample of every batch is taken and kept at least one year. All ingredients are purchased from approved suppliers. This cement has passed the following test (performed in accordance with ASTM Std. D 2235):

Lap Shear:

- 800 psi

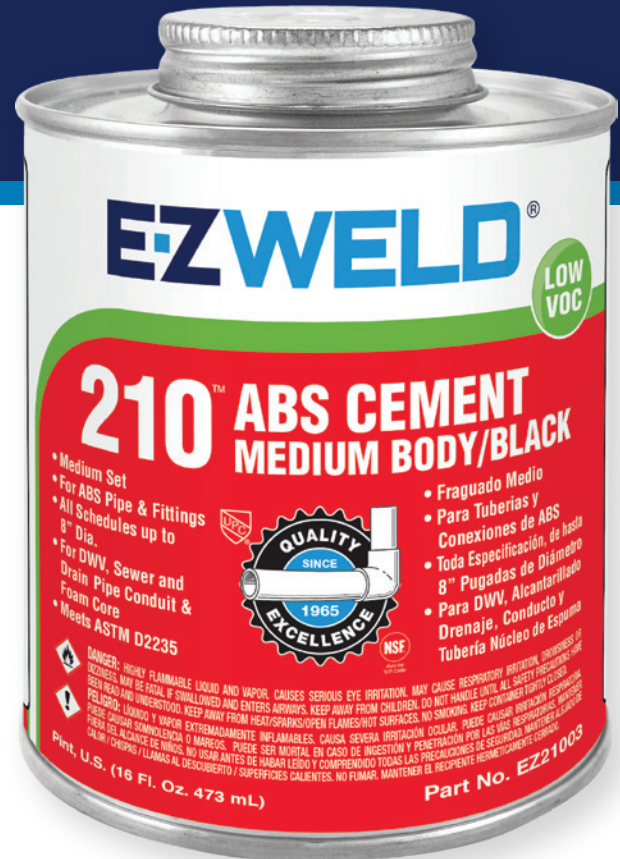

Physical Properties:

Color: Black
Body: Medium Bodied
Set: Medium
Specific Gravity: 0.890
Shelf life: 3 years (Unopened can)

LOW VOC (VOLATILE ORGANIC COMPOUND)

Maximum VOC per SCAQMD 1168/316A: 325 g/l

Availability:

Size	Part No. Regular	(UPC No.)
1/4pt	EZ21001	892996002416
1/2pt	EZ21002	892996002454
Pt	EZ21003	892996002454
Qt	EZ21004	892996002454
Gal	EZ21005	892996002454

¼ pt., ½ pt., Pt. And Qt. cans are supplied with dauber inside cap. Gallon sizes supplied with plain cap only.

*= recommended



210 ABS CEMENT MEDIUM BODY/BLACK

Packaging:

Size	¼ Pt	½ Pt	Pt	Qt	Gal
Fluid oz	4	8	16	32	128
Liters	0.12	0.24	0.47	0.95	3.78
Units per case	24	24	12	12	6
Weight per case - Lb.	9.5	16	15.5	28	54
Weight per case - Kg	4.32	7.27	7.05	12.73	24.55
Cubic feet per case	0.260	0.420	0.404	0.762	1.221
Cubic meter per case	0.007	0.012	0.011	0.022	0.035
Cases per pallet	145	90	88	56	27

Safety Precautions:

Ensure adequate ventilation to avoid vapor build up which may cause flash fire. Vapor build up may also cause dizziness, headaches or eye watering. If symptoms are experienced use respiratory protection (NOISH/MSHA TC-23C or equivalent) or leave area and provide more fresh air. Avoid contact with eyes, skin and clothing by use of safety glasses and gloves. Professionals should consult ASTM Standard F402 - 18 Standard Practice for Safe Handling of Solvent Cements, Primers, and Cleaners Used for Joining Thermoplastic Pipe and Fittings. Professional users should also read the Safety Data Sheet for the product.

Inhalation: If breathing is difficult vacate to fresh air. If breathing problems persist seek immediate medical attention.

Eyes: Flush eyes thoroughly with water for 15 minutes. Get immediate medical attention.

Internal: If swallowed give 1 or 2 glasses of water immediately, call physician, hospital or poison control immediately. **DO NOT INDUCE VOMITING.**

Shipping / Transportation:

Material packaged in less than a liter size is exempted under "Limited Quantity Rules" by DOT. These packages may be shipped with the description ORM - D Consumer Commodity. Packages shipped under this description are not subject to shipping paper requirements for flammable materials.

For a liter and larger sizes (gallon and above container):

Proper Shipping Name: Adhesive

Flammable Class: 3

UN No: UN 1133

Packing Group: PG II

REV/12/18