


PVC Conduit Schedule 40



Schedule 40 PVC Conduit are manufactured with rigid Polyvinyl Chloride (PVC-U) compound according to the specifications of the UL 651 and ASTM D 1784 STANDARD.

- UL Listed **SUNLIGHT RESISTANT** according UL 651 - file number E528320
- Certified for underground and above ground usage
- For direct burial and encased burial usage
- Rigid nonmetallic raceway for wires and cables
- 10' Lengths
- 20' Lengths (on request)

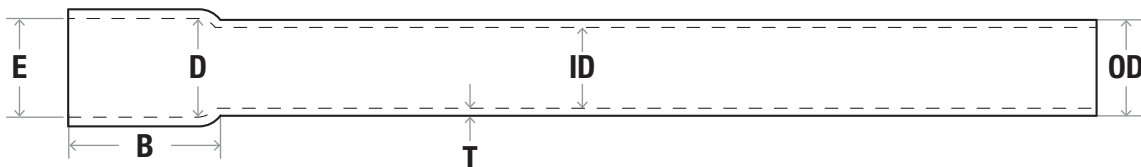

PVC Conduit Sch. 40 (Crate Quantities)									
Item No.	Size	Minimum wall (T)	Average (OD)	Average (ID)	Average entrance (E)	Average bottom (D)	Length Feet	Bell End (B)	Feet per pack
EZP01UC	1/2	0.109	0.840	0.578	0.852	0.836	10	1.77	6,000
EZP02UC	3/4	0.113	1.050	0.780	1.064	1.046	10	2.16	4,400
EZP10UC	1	0.133	1.315	1.004	1.330	1.310	10	2.56	3,600
EZP11UC	1-1/4	0.140	1.660	1.335	1.677	1.655	10	3.15	3,300
EZP12UC	1-1/2	0.145	1.900	1.564	1.918	1.894	10	3.15	2,250
EZP20UC	2	0.154	2.375	2.021	2.393	2.369	10	3.15	1,400
EZP21UC	2-1/2	0.203	2.875	2.414	2.890	2.868	10	3.15	930
EZP30UC	3	0.216	3.500	3.008	3.515	3.492	10	3.94	880
EZP31UC	3-1/2	0.226	4.000	3.486	4.015	3.992	10	3.94	630
EZP40UC	4	0.237	4.500	3.961	4.515	4.491	10	3.94	570
EZP50UC	5	0.258	5.563	4.975	5.593	5.553	10	3.94	380
EZP60UC	6	0.280	6.625	5.986	6.658	6.614	10	5.90	260